



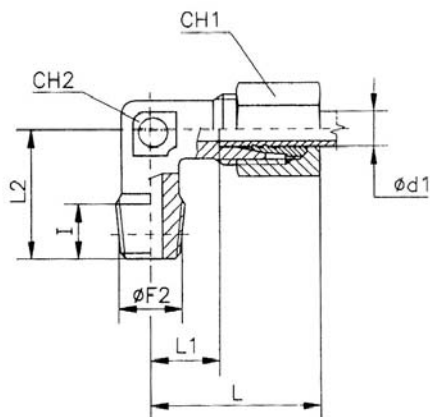

V 93

Winkel-Einschraubverschraubung, Außengewinde konisch nach ISO 7-1


Artikel-Nr.	Rohr- Außen- Ø	PN	Ø F2 Gewinde R	I	L	L1	L2	CH1	CH2
V 85	4	100	1/8	8	21	11,0	17	10	9
V 86	5	100	1/8	8	21	9,5	17	12	9
V 87	6	100	1/8	8	21	9,5	17	12	9
V 88	8	100	1/8	8	23	11,5	20	14	12
V 90	6	315	1/8	8	27	12,0	20	14	12
V 91	8	315	1/8	8	29	14,0	26	17	12
V 92	6	315	1/4	12	29	14,0	26	14	12
V 93	8	315	1/4	12	29	14,0	26	17	12
V 94	10	315	1/4	12	30	15,0	27	19	14
V 95	12	315	1/4	12	32	17,0	28	22	17
V 97	8	315	3/8	12	32	17,0	28	17	17
V 98	10	315	3/8	12	32	17,0	28	19	17
V 99	12	315	3/8	12	32	17,0	28	22	17
V 100	15	315	3/8	12	36	21,0	34	27	19
V 101	10	315	1/2	14	36	21,0	34	19	19
V 102	12	315	1/2	14	36	21,0	34	22	19
V 103	15	315	1/2	14	36	21,0	34	27	19
V 104	18	315	1/2	14	40	23,5	36	32	24
V 106	22	160	3/4	16	44	27,5	42	36	27

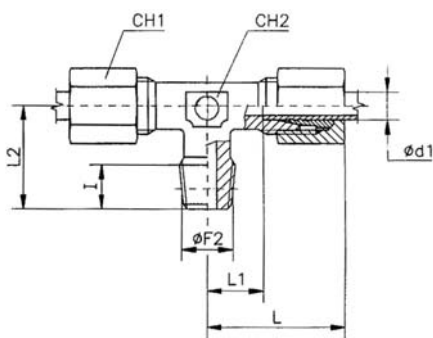

V 113

T-Einschraubverschraubung, Außengewinde konisch nach ISO 7-1


Artikel-Nr.	Rohr- Außen- Ø	PN	Ø F2 Gewinde R	I	L	L1	L2	CH1	CH2
V 110	4	100	1/8	8	21	11,0	17	10	9
V 112	6	100	1/8	8	21	9,5	17	12	9
V 113	8	100	1/8	8	23	11,5	20	14	12
V 116	6	630	1/4	12	31	16,0	26	17	12
V 117	8	315	1/4	12	29	14,0	26	17	12
V 118	10	315	1/4	12	30	15,0	27	19	14
V 121	12	315	3/8	12	32	17,0	28	22	17
V 125	15	315	1/2	14	36	21,0	34	27	19
V 126	18	315	1/2	14	40	23,5	36	32	24
V 127	22	160	3/4	16	44	27,5	42	36	27

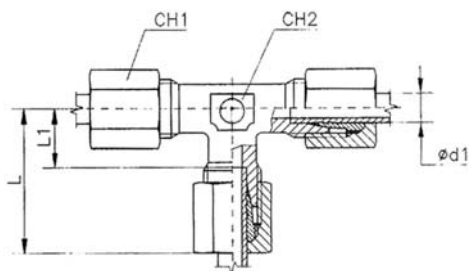

V 136

T-Verschraubung

Artikel-Nr.	Rohr- Außen-Ø	PN	L	L1	CH1	CH2
V 130	4	100	21	11,0	10	9
V 131	5	100	21	9,5	12	9
V 132	6	100	21	9,5	12	9
V 133	8	100	23	11,5	14	12
V 135	6	315	27	12,0	14	12
V 136	8	315	29	14,0	17	12
V 137	10	315	30	15,0	19	14
V 138	12	315	32	17,0	22	17
V 139	15	315	36	21,0	27	19
V 140	18	315	40	23,5	32	24
V 141	22	160	44	27,5	36	27

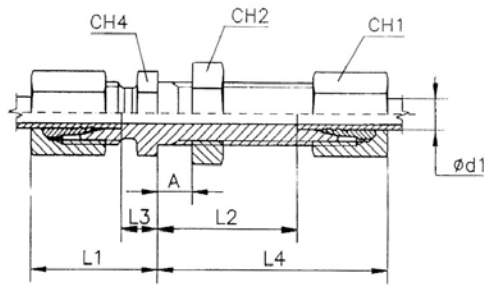


V 172

Gerade Schottverschraubung

Artikel-Nr.	Rohr-Außen-Ø	PN	L1	L2	L3	L4	CH1	CH2*	CH4
V 170	6	315	22	27,0	7,0	42	14	17	17
V 171	8	315	23	27,0	8,0	42	17	19	19
V 172	10	315	25	28,0	10,0	43	19	22	22
V 173	12	315	25	29,0	10,0	44	22	24	24
V 174	15	315	27	31,0	12,0	46	27	30	27
V 175	18	315	30	32,5	13,5	49	32	36	32
V 176	22	160	33	34,5	16,5	51	36	41	36

*Sechskantschlüssel gemäß DIN 80705

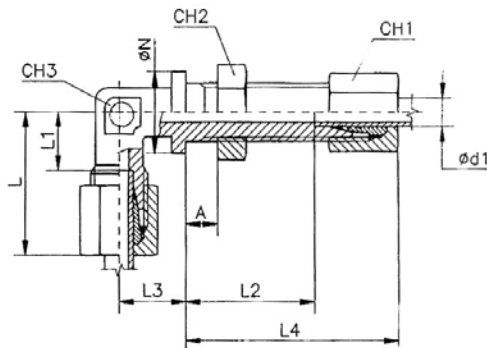


V 182

Winkel-Schottverschraubung

Artikel-Nr.	Rohr-Außen-Ø	PN	L	L1	L2	L3	L4	Ø N	CH1	CH2*	CH3
V 180	6	315	27	12	27	14	42	17	14	17	12
V 181	8	315	29	14	27	17	42	19	17	19	12
V 182	10	315	30	15	28	18	43	22	19	22	14
V 183	12	315	32	17	29	20	44	24	22	24	17
V 184	15	315	36	21	31	23	46	27	27	30	19

*Sechskantschlüssel gemäß DIN 80705

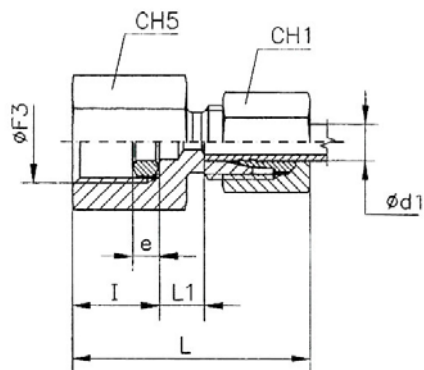


V 201

Manometer-Anschlussverschraubung, Innengewinde zylindrisch

Artikel-Nr.	Rohr-Außen-Ø	PN	Ø F3	L	L1	CH1	CH5	e*	I
V 200	6	315	1/4	37	7,5	14	19	4,5	14,5
V 201	8	315	1/4	37	7,5	17	19	4,5	14,5
V 202	10	315	1/4	38	8,5	19	19	4,5	14,5
V 203	12	315	1/4	38	8,5	22	19	4,5	14,5
V 205	6	630	1/2	46	11,0	17	27	5,0	20,0
V 206	8	630	1/2	46	11,0	19	27	5,0	20,0
V 207	10	630	1/2	47	10,5	22	27	5,0	20,0
V 208	12	630	1/2	47	10,5	24	27	5,0	20,0


*Dichtring mit Einschnittkante

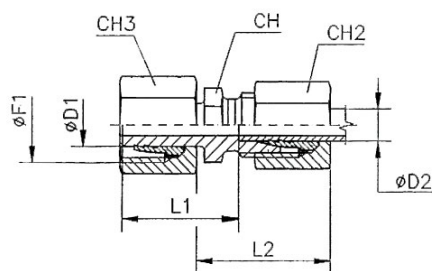

V 212-VM

Reduzierungen


Artikel-Nr.	Ø D1	Ø D2	PN	L1	L2	CH2	CH3	Ø F1	CH
V 210-VM	8	6	315	29,5	30	14	17	14x1,5	14
V 211-VM	10	6	315	29,5	30	14	19	16x1,5	14
V 212-VM	10	8	315	29,5	30	17	19	16x1,5	17
V 213-VM	12	6	315	29,5	30	14	22	18x1,5	14
V 214-VM	12	8	315	29,5	30	17	22	18x1,5	17
V 215-VM	12	10	315	31,0	31	19	22	18x1,5	17
V 216-VM	15	6	315	29,5	29	14	27	22x1,5	17
V 217-VM	15	8	315	29,5	29	17	27	22x1,5	17
V 218-VM	15	10	315	31,0	30	19	27	22x1,5	17
V 219-VM	15	12	315	31,0	30	22	27	22x1,5	19



V 353

Schneidringe

Artikel-Nr.	Rohr- Außen-Ø	PN	Ø F1	Ø G	A	M	CH
V 350	4	100	8x1	4	11,0	6,0	10
V 351	5	100	10x1	5	11,5	7,0	12
V 352	6	100	10x1	6	11,5	7,0	12
V 353	8	100	12x1	8	12,0	7,0	14
V 360	6	315	12x1,5	6	14,5	9,5	14
V 361	8	315	14x1,5	8	14,5	9,5	17
V 362	10	315	16x1,5	10	15,5	10,0	19
V 363	12	315	18x1,5	12	15,5	10,0	22
V 364	15	315	22x1,5	15	17,0	10,0	27
V 365	18	315	26x1,5	18	18,0	10,5	32
V 366	22	160	30x2	22	20,0	11,0	36



V 403

Überwurfmuttern

Artikel-Nr.	Rohr- Außen-Ø	PN	Ø F1	Ø G	A	M	CH
V 400	4	100	8x1	4	11,0	6,0	10
V 401	5	100	10x1	5	11,5	7,0	12
V 402	6	100	10x1	6	11,5	7,0	12
V 403	8	100	12x1	8	12,0	7,0	14
V 405	6	315	12x1,5	6	14,5	9,5	14
V 406	8	315	14x1,5	8	14,5	9,5	17
V 407	10	315	16x1,5	10	15,5	10,0	19
V 408	12	315	18x1,5	12	15,5	10,0	22
V 409	15	315	22x1,5	15	17,0	10,0	27
V 410	18	315	26x1,5	18	18,0	10,5	32
V 411	22	160	30x2	22	20,0	11,0	36

Baumaße sind Circa-Maße bei angezogener Überwurfmutter.

Abteilung ZeDok

Tel. 07125/949741, 949742, 949753

Fax. 07125/949799

e-mail: zedok@riegler.de

Ausgabe 04/2011 Technische Änderungen vorbehalten.

Riegler & Co. KG, Druckluft-Armaturen