


Material:
max. Betriebsdruck:
verwendbare Schläuche:

Messing vernickelt
18 bar
PA, PE, PU



13.614-8-E

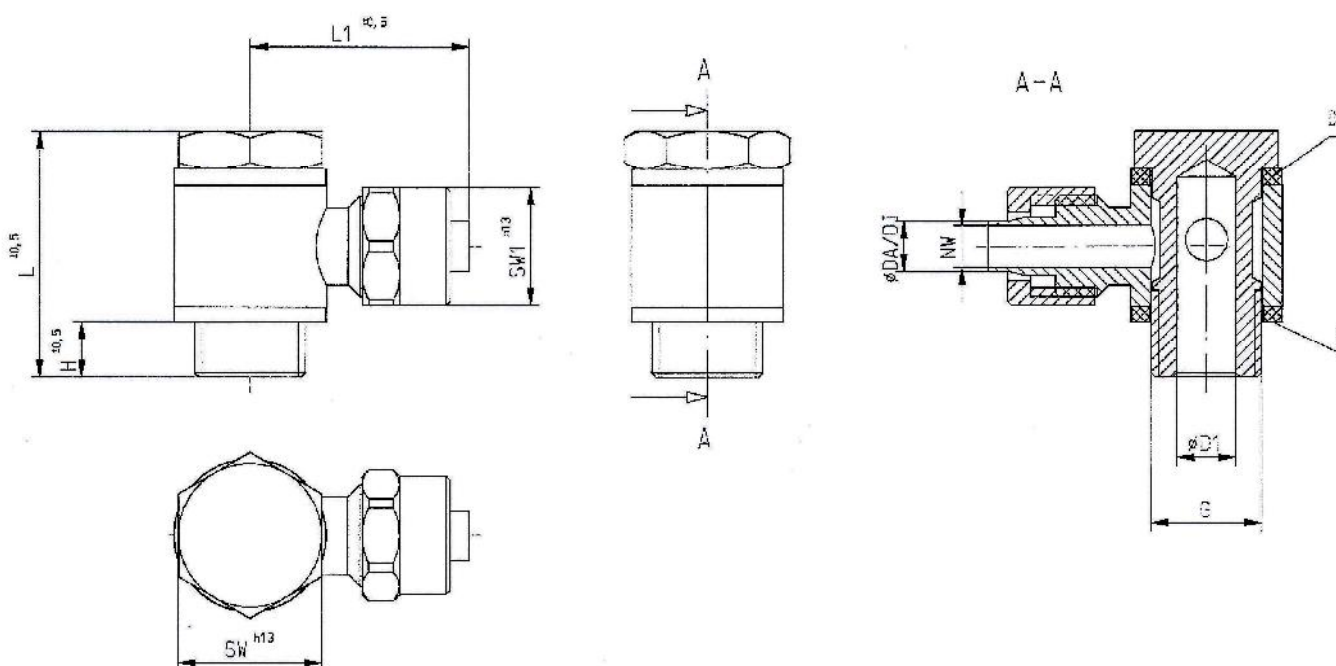

Winkelschwenkverschraubung, Außengewinde zylindrisch

Artikel-Nr.	NW	ØDA/DI	G	SW	SW1	H	L	L1	ØD1	Gewicht
13.605-5-E	2,0	5/3	M5	8	8	3,0	17,5	17,0	2	10 g
13.605-6-E	3,0	6/4	M5	8	9	3,0	17,5	18,0	2	11 g
13.618-6-E	3,0	6/4	1/8	14	12	6,0	28,0	24,0	5	33 g
13.618-8-E	5,0	8/6	1/8	14	14	6,0	28,0	24,0	5	35 g
13.614-6-E	3,0	6/4	1/4	17	12	6,5	29,5	26,0	7	49 g
13.614-8-E	5,0	8/6	1/4	17	14	6,5	29,5	26,0	7	51 g
13.614-10-E	6,5	10/8	1/4	17	16	9,0	33,0	27,5	7	71 g
13.638-8-E	5,0	8/6	3/8	22	14	6,5	31,5	27,5	9	54 g
13.638-10-E	6,5	10/8	3/8	22	16	6,5	31,5	28,5	9	75 g