


Material:	Messing blank
Arbeitsdruck:	10 bar
Mediumstemperatur:	max. 90 °C
Umgebungstemperatur:	max. 90 °C
Gewinde:	DIN ISO 228



LN 1280

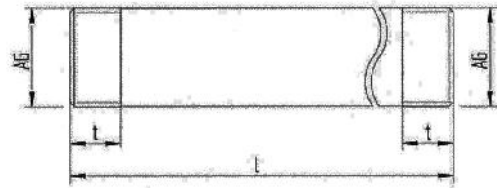

Rohrnippel in Langausführung, Messing blank

Artikel-Nr.	Gewinde G außen	Länge mm	t mm
LN 1230	1/2	30	15
LN 1240	1/2	40	15
LN 1250	1/2	50	15
LN 1260	1/2	60	15
LN 1280	1/2	80	15
LN 12100	1/2	100	15
LN 12120	1/2	120	15
LN 12150	1/2	150	15
LN 12180	1/2	180	15
LN 12200	1/2	200	15
LN 3440	3/4	40	15
LN 3460	3/4	60	15
LN 3480	3/4	80	15
LN 34100	3/4	100	15
LN 34120	3/4	120	15
LN 34150	3/4	150	15
LN 34180	3/4	180	15
LN 34200	3/4	200	15
LN 10040	1	40	17
LN 10060	1	60	17
LN 10080	1	80	17
LN 100100	1	100	17
LN 100120	1	120	17
LN 100150	1	150	17
LN 100180	1	180	17
LN 100200	1	200	17

Artikel-Nr.	Gewinde G außen	Länge mm	t mm
LN 11460	1 1/4	60	19
LN 11480	1 1/4	80	19
LN 114100	1 1/4	100	19
LN 114120	1 1/4	120	19
LN 114150	1 1/4	150	19
LN 114180	1 1/4	180	19
LN 114200	1 1/4	200	19
LN 11260	1 1/2	60	19
LN 11280	1 1/2	80	19
LN 112100	1 1/2	100	19
LN 112120	1 1/2	120	19
LN 112150	1 1/2	150	19
LN 112200	1 1/2	200	19
LN 20060	2	60	23,5
LN 20080	2	80	23,5
LN 200100	2	100	23,5
LN 200120	2	120	23,5
LN 200150	2	150	23,5
LN 200200	2	200	23,5