


- Edelstahl 1.4408 -

Arbeitsdruck:
Innengewinde:
Außengewinde:

max. 20 bar
zylindrisch nach DIN EN ISO 228-1
zylindrisch nach DIN EN ISO 228-1

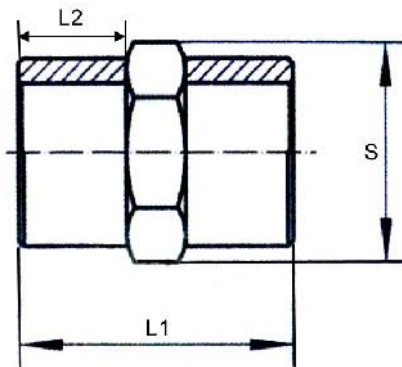

262.06-ES

Doppelnippel, 6-kant

Art.-Nr.	Gewinde G	SW	L1	L2	S
262.01-ES	1/8	13	30,0	12,0	12,8
262.02-ES	1/4	16	32,0	13,0	15,7
262.03-ES	3/8	20	33,5	13,0	19,7
262.04-ES	1/2	25	38,0	15,0	24,5
262.05-ES	3/4	29	45,5	18,0	28,7
262.06-ES	1	36	51,0	19,0	35,0
262.07-ES	1 1/4	46	57,0	22,0	45,6
262.08-ES	1 1/2	51	58,5	23,0	50,0
262.09-ES	2	63	65,0	26,0	62,0