


- Edelstahl 1.4408 -

Arbeitsdruck:
Innengewinde:
Außengewinde:

max. 20 bar
zylindrisch nach DIN EN ISO 228-1
zylindrisch nach DIN EN ISO 228-1

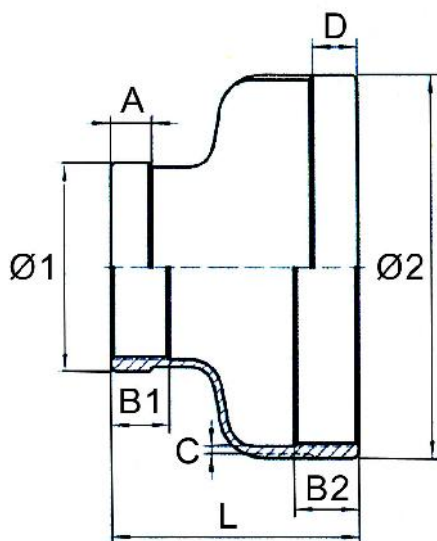

267.07-ES

Reduziermuffe, rund

Art.-Nr.	Innen-Gewinde 1 G	Innen-Gewinde 2 G	Ø1	Ø2	L
267.01-ES	1/4	1/8	16,7	20,5	27,3
267.02-ES	3/8	1/8	17,0	24,4	28,0
267.03-ES	3/8	1/4	21,0	24,7	29,0
267.04-ES	1/2	1/4	21,0	28,0	32,0
267.05-ES	1/2	3/8	21,0	27,5	34,0
267.06-ES	3/4	3/8	23,5	32,8	36,0
267.07-ES	3/4	1/2	27,0	32,5	38,0
267.08-ES	1	1/2	27,5	40,5	40,5
267.09-ES	1	3/4	32,5	40,3	41,5
267.10-ES	1 1/4	3/4	32,5	49,5	45,0
267.11-ES	1 1/4	1	40,5	49,5	48,0
267.12-ES	1 1/2	1	40,0	56,0	53,5
267.13-ES	1 1/2	1 1/4	49,0	56,0	54,0
267.14-ES	2	1	40,5	68,0	54,0
267.15-ES	2	1 1/2	55,8	68,0	56,0