



- Edelstahl 1.4408 -

Arbeitsdruck:
Innengewinde:
Außengewinde:

max. 20 bar
zylindrisch nach DIN EN ISO 228-1
zylindrisch nach DIN EN ISO 228-1

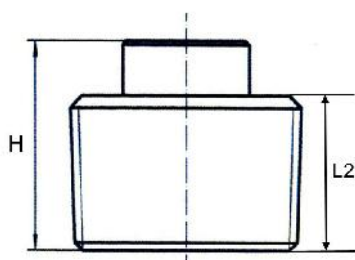

260.06-ES

Verschlussstopfen, 4-kant

Art.-Nr.	Gewinde G	H	L2	S
260.01-ES	1/8	16,0	9,0	7,0
260.02-ES	1/4	19,3	11,4	9,0
260.03-ES	3/8	21,2	12,0	12,0
260.04-ES	1/2	25,0	15,0	14,0
260.05-ES	3/4	28,0	17,0	16,9
260.06-ES	1	31,0	19,0	19,0
260.07-ES	1 1/4	35,0	21,9	23,0
260.08-ES	1 1/2	35,9	21,5	25,9
260.09-ES	2	41,0	26,2	32,0