


- Edelstahl 1.4408 -

Arbeitsdruck:
Innengewinde:
Außengewinde:

max. 10 bar
zylindrisch nach DIN EN ISO 228-1
zylindrisch nach DIN EN ISO 228-1

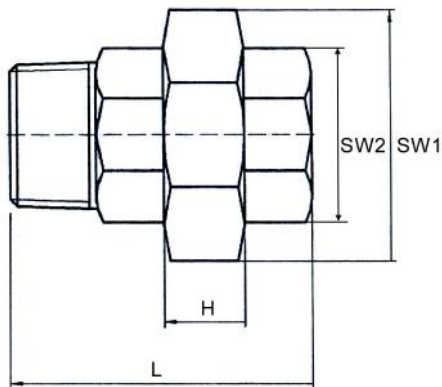

260.06-ES

Lösbarer Doppelnippel, Innen/Innengewinde, Abdichtung konisch

Art.-Nr.	Gewinde G	L	H	SW1	SW2
271.01-ES	1/8	31,2	13,2	29,0	18,0
271.02-ES	1/4	32,5	13,2	29,0	18,0
271.03-ES	3/8	34,7	14,2	34,0	22,0
271.04-ES	1/2	38,5	15,5	39,0	26,0
271.05-ES	3/4	42,0	16,0	47,0	32,0
271.06-ES	1	48,5	18,4	58,0	40,0
271.07-ES	1 1/4	54,7	20,7	67,0	49,0
271.08-ES	1 1/2	57,5	22,5	76,0	55,0
271.09-ES	2	64,0	25,0	90,0	67,0