

Messing blank



Messing vernickelt

T-Stück

Messing blank
Messing vernickelt

MS 58


254.xx

150 °C max.

Art-Nr. ⁽²⁾	Gewinde	Maße						
	zyl. (DIN EN ISO 228-1) kon. (DIN 2999)	Δ	Betr.- Druck (bar)	H	L ₁	L ₂	SW	
254.02 254.03 254.04 254.05 254.06 254.07	a / a / a							
	R 1/8	6,0	150	8,0	37,0	18,5	10	
	R 1/4	8,0	100	11,0	47,0	23,5	13	
	R 3/8	11,0	75	11,5	52,0	26,0	17	
	R 1/2	15,0	50	14,0	62,0	31,0	21	
	R 3/4	19,0	85	16,2	66,4	33,0	25	
	R 1	24,0	80	16,1	78,0	39,0	30	
254.33 254.34 254.35 254.39 254.48 254.49	i / i / i							
	G 1/8	6,0	150	12,3	21,0	42,0	10	
	G 1/4	8,0	100	14,0	25,5	51,0	13	
	G 3/8	11,0	75	14,0	28,0	56,0	17	
	G 1/2	15,0	50	16,0	33,5	67,0	21	
	G 3/4	19,0	85	17,5	36,5	73,0	25	
	G 1	24,0	80	21,0	45,0	90,0	30	
254.41 254.42 254.43 254.44 254.45 254.46	i / a / i							
	G/R 1/8	6,0	150	9,0	42,0	18,5	10	
	G/R 1/4	8,0	100	13,0	51,0	23,5	13	
	G/R 3/8	11,0	75	13,0	56,0	26,0	17	
	G/R 1/2	15,0	50	15,0	67,0	31,0	21	
	G/R 3/4	19,0	85	17,0	73,0	33,0	25	
	G/R 1	24,0	80	17,0	90,0	39,0	30	

(2) Nickel mit Vorsatz >N< bestellen

Art-Nr. ⁽²⁾	Gewinde	Maße					
	zyl. (DIN EN ISO 228-1) kon. (DIN 2999)	Δ	Betr.- Druck (bar)	H	L ₁	L ₂	SW
254.71	i / i / a G/R 1/8	6,0	150	11,0	39,5	21,0	10
254.72	G/R 1/4	8,0	100	13,0	49,0	23,5	13
254.73	G/R 3/8	11,0	75	13,5	54,0	28,0	17
254.74	G/R 1/2	15,0	50	15,0	64,5	33,5	21
254.75	G/R 3/4	19,0	85	16,5	69,5	36,5	25
254.76	G/R 1	24,0	80	17,5	84,0	45,0	30

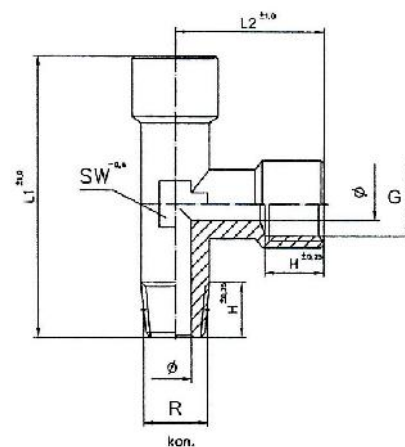

(2) Nickel mit Vorsatz >N< bestellen