



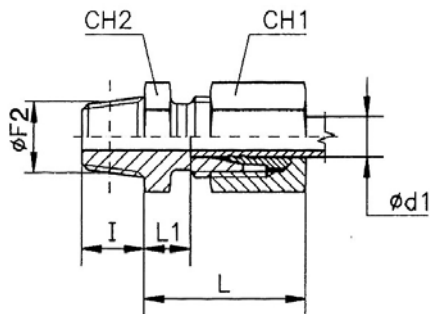

V 35

Gerade Einschraubverschraubung, Außengewinde konisch nach ISO 7-1


Artikel-Nr.	Rohr- Außen- Ø	PN	Ø F2 Gewinde R	I	L	L1	CH1	CH2
V 21	4	100	1/8	8	18	8,0	10	11
V 22	5	100	1/8	8	18	6,5	12	11
V 23	6	100	1/8	8	18	6,5	12	11
V 24	8	100	1/8	8	20	8,5	14	12
V 25	6	315	1/8	10	23	7,0	14	12
V 26	8	315	1/8	10	25	8,0	17	14
V 28	6	315	1/4	13	24	8,0	14	17
V 29	8	315	1/4	13	25	8,0	17	17
V 30	10	315	1/4	13	26	9,0	19	17
V 31	12	315	1/4	13	27	10,0	22	19
V 33	6	315	3/8	13	20	9,0	14	19
V 34	8	315	3/8	13	26	9,0	17	19
V 35	10	315	3/8	13	27	10,0	19	19
V 36	12	315	3/8	13	27	10,0	22	19
V 37	15	315	3/8	13	29	11,0	27	24
V 38	8	315	1/2	16	26	9,0	17	22
V 39	10	315	1/2	16	27	10,0	19	22
V 40	12	315	1/2	16	27	10,0	22	22
V 41	15	315	1/2	16	29	11,0	27	24
V 42	18	315	1/2	16	31	11,5	32	27
V 43	18	160	3/4	18	32	11,5	32	32
V 44	22	160	3/4	18	33	13,5	36	32

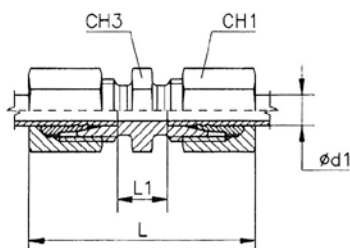

V 55

Gerade Verschraubung

Artikel-Nr.	Rohr-Außen-Ø	PN	L	L1	CH1	CH3
V 50	4	100	31	12	10	9
V 51	5	100	32	9	12	11
V 52	6	100	32	9	12	11
V 53	8	100	35	12	14	12
V 54	6	315	39	10	14	12
V 55	8	315	40	11	17	14
V 56	10	315	42	13	19	17
V 57	12	315	43	14	22	19
V 58	15	315	46	16	27	24
V 59	18	315	48	16	32	27
V 60	22	160	52	20	36	32

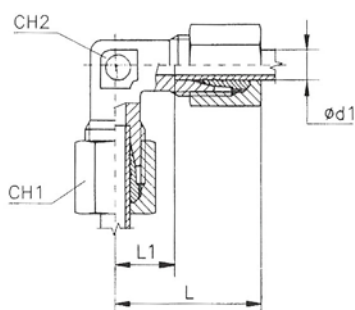

V 75

Winkel-Verschraubung

Artikel-Nr.	Rohr-Außen-Ø	PN	L	L1	CH1	CH2
V 70	4	100	21	11,0	10	9
V 71	5	100	21	9,5	12	9
V 72	6	100	21	9,5	12	9
V 73	8	100	23	11,5	14	12
V 74	6	315	27	12,0	14	12
V 75	8	315	29	14,0	17	12
V 76	10	315	30	15,0	19	14
V 77	12	315	32	17,0	22	17
V 78	15	315	36	21,0	27	19
V 79	18	315	40	23,5	32	24
V 80	22	160	44	27,5	36	27

Baumaße sind Circa-Maße bei angezogener Überwurfmutter.