


Material: Aluminium
Dämpfungsmaterial: LX 01 bis LX 12 = gesintertes PE
LX 15 bis LX 20 = Baumwolltucheinlage
Arbeitsdruck: 0 - 10 bar
Betriebstemperatur: -10 °C bis +70 °C
Lärmreduzierung: ≥ 20 dB

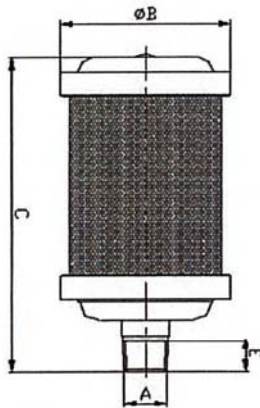


LX 05

Hochleistungsschalldämpfer

Artikel-Nr.	Gewinde G	Durchfluss l/min bei 5 bar	E	B	C
LX 01	1/8	629	9,0 ±2	47,0 ±2	80 ±2,5
LX 02	1/4	1211	11,0 ±2	47,0 ±2	111 ±3
LX 03	3/8	2230	13,0 ±2	66,0 ±2	130 ±3
LX 05	1/2	2712	14,5 ±2	80,0 ±2	148 ±3
LX 07	3/4	6059	17,0 ±2	86,5 ±2	184 ±3,5
LX 10	1	6348	22,0 ±2	99,0 ±2	222 ±3,5
LX 12	1 1/4	6946	22,0 ±2	99,0 ±2	226 ±3,5
LX 15	1 1/2	49000	25,0 ±2	133,5 ±2	340 ±5
LX 20	2	57000	26,0 ±2	133,5 ±2	470 ±5

Durchflusswerte:

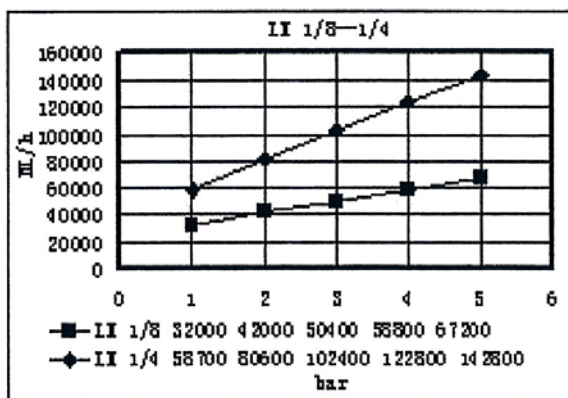

LX 01 und LX 02

Abteilung ZeDok

Tel. 07125/949741, 949742, 949753, 9497330


Fax. 07125/949799

e-mail: zedok@riegler.de


Ausgabe 04/2013 Technische Änderungen vorbehalten.

Riegler & Co. KG, Druckluft-Armaturen


Durchflusswerte:

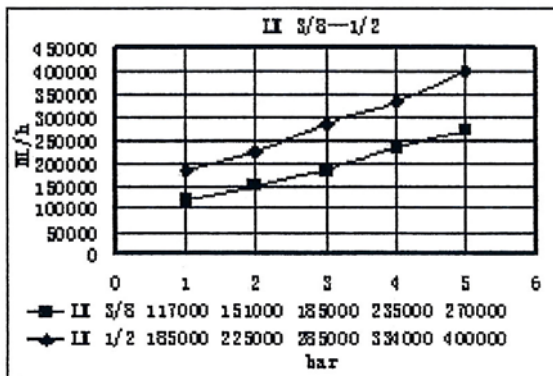


LX 03 und LX 05

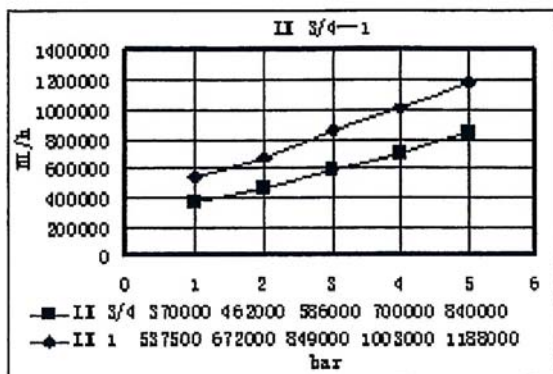

LX 07 und LX 10

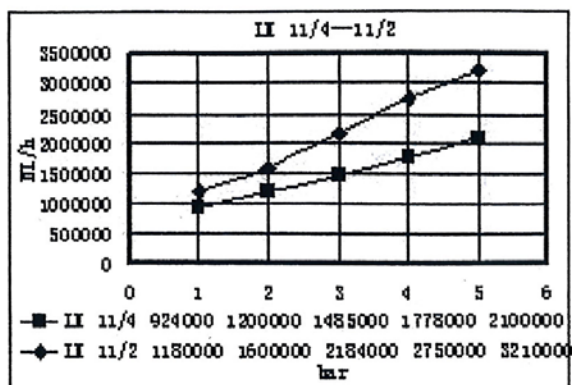

LX 12 und LX 15

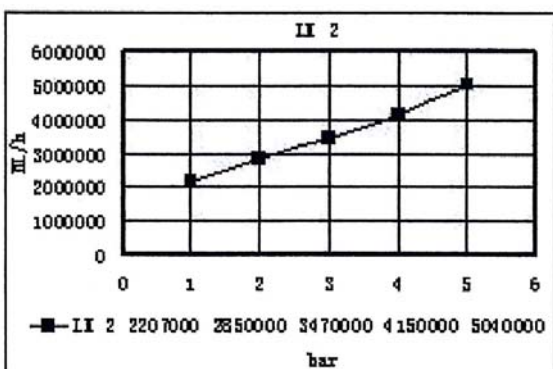

LX 20