


- kleine Baureihe -

Material: Edelstahl 1.4401 / 1.4408
Handhebel: Edelstahl 1.4301
Dichtungsmaterial: RPTFE 15 % Glasfaser verstärkt
Betriebstemperatur: - 40 °C bis 200 °C
Betriebsdruck: max. 70 bar (abhängig von Anschlussgröße und Temperatur)

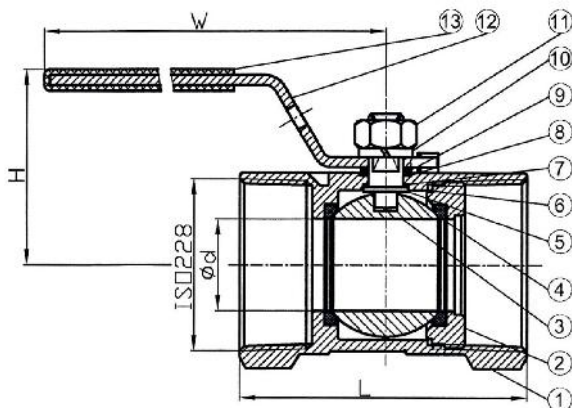

375.01-ES

Kugelhahn

Artikel-Nr.	Gewinde G	Ø d	DN	L	H	W	CV FACTOR	Drehmoment N.M	Gewicht in Gramm
375.01-ES	1/4	5,0	8	39,0	34	69,0	4.0	0.6	74,0
375.02-ES	3/8	7,0	10	44,0	38,0	83,0	4.0	0.9	110,0
375.03-ES	1/2	10,0	15	59,0	41,0	96,0	4.5	1.0	186,0
375.04-ES	3/4	13,0	20	60,0	45,0	96,0	9.0	2.0	260,0

Material:

NO.	PART NAME	MATERIAL
1	BODY	CF8M
2	CAP	CF8M
3	BALL	CF8M
4	SEAT	RPTFE
5	STEM	SUS316
6	GASKET	RPTFE
7	THRUST WASHER	RPTFE
8	PACKING	RPTFE
9	WASHER	SUS304
10	SPRING WASHER	SUS304
11	STEM NUT	SUS304
12	HANDLE	SUS304
13	PLASTIC COVER	PLASTIC

Übersicht Druck und Temperatur:

Temperatur	Druck
20 °C	70 bar
60 °C	65 bar
100 °C	45 bar
150 °C	7 bar
180 °C	4 bar
200 °C	0 bar

