



- Durchgangsform, voller Durchgang -

Gehäuse: Messing
Ventilteller: Edelstahl
Dichtung: NBR
Ventilstift: Messing
Feder: Edelstahl
Betriebstemperatur: -20 °C bis +100 °C
Öffnungsdruck: 0,2 - 0,4 bar
Gewinde: G-Gewinde nach DIN EN ISO 228-1

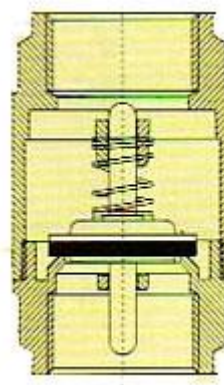

9227.32

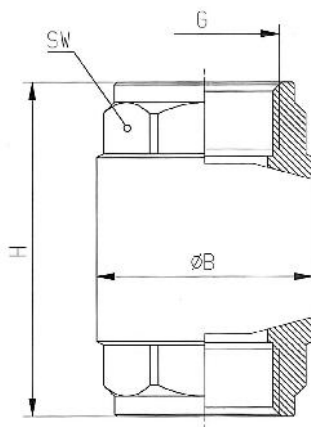

Rückschlagventil

Art.-Nr.	Gewinde	max. Betriebsdruck	SW	H	Ø B
9227.31	G 3/8	25,0	23	54,0	34,5
9227.32	G 1/2	25,0	27	57,0	34,5
9227.33	G 3/4	25,0	33	64,0	41,5
9227.34	G 1	25,0	40	75,0	48,0
9227.35	G 1 1/4	18,0	50	82,0	60,5
9227.36	G 1 1/2	18,0	55	93,0	71,0
9227.37	G 2	18,0	70	100,0	87,0

Nome scheda Diagramma Perdite di carico
 Sheet Name Loss diagram

Dim.	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
Kv		2,99	4,12	7,03	11,45	16,54	24,12	39,32	70,64	105,60	155,30

Denominazione Valvola di ritegno Europa - Valvola di ritegno Roma
 Denomination Europa check valve - Roma check valve

