

Sinterbronze-Schalldämpfer, flache Ausführung, mit Außengewinde

Zur Reduzierung von Abluftgeräuschen an pneumatischen Anlagen

Betriebsdruck:


max. 12,0 bar

Betriebstemperatur:

max. -10 bis +150 °C



560-2

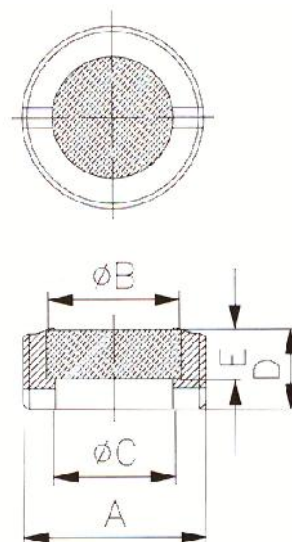

Art.-Nr.	A	ØB	C	D	E
560-1	G 1/8	6,0	5,0	4,0	3,0
560-2	G 1/4	8,0	6,0	4,0	3,0
560-3	G 3/8	10,0	8,0	5,0	3,0
560-4	G 1/2	15,0	12,0	8,0	4,0
560-5	G 3/4	20,0	17,0	10,0	4,0
560-6	G 1	26,0	23,0	10,0	4,0

Art.-Nr.	Gewinde	1 BAR	2 BAR	3 BAR	4 BAR	5 BAR	6 BAR	mit Schalldämpfer in DB
560-1	1/8	68,0	80,0	87,0	88,0	89,0	90,0	
560-2	1/4	68,0	76,0	82,0	85,0	88,0	90,0	
560-3	3/8	80,0	84,0	99,0	92,0	95,0	97,0	
560-4	1/2	83,0	91,0	97,0	100,0	102,0	105,0	
560-5	3/4	86,0	92,0	96,0	100,0	103,0	106,0	
560-6	1	97,0	101,0	104,0	106,0	109,0	111,0	

Art.-Nr.	Gewinde	1 BAR	2 BAR	3 BAR	4 BAR	5 BAR	6 BAR	Durchfluss in Nm³/h
560-1	1/8	3,4	5,0	6,0	6,5	7,3	8,0	
560-2	1/4	6,4	9,0	10,7	12,3	13,8	15,0	
560-3	3/8	10,5	14,3	16,7	16,0	20,0	22,0	
560-4	1/2	15,5	20,0	25,0	28,0	30,0	36,0	
560-5	3/4	27,0	37,0	45,0	54,0	60,0	65,0	
560-6	1	50,0	70,0	85,0	96,0	106,0	110,0	

Art.-Nr.	Gewinde	1 BAR	2 BAR	3 BAR	4 BAR	5 BAR	6 BAR	ohne Schalldämpfer in DB
560-1	1/8	101,0	110,0	118,0	122,0	122,5	122,6	
560-2	1/4	109,0	112,0	124,0	124,0	124,0	124,0	
560-3	3/8	107,0	116,0	124,0	124,2	125,0	125,0	
560-4	1/2	110,0	118,0	120,0	120,0	123,0	124,0	
560-5	3/4	113,0	117,0	120,0	122,0	123,0	123,0	
560-6	1	115,0	123,0	124,0	124,0	125,0	125,0	

Art.-Nr.	Gewinde	1 BAR	2 BAR	3 BAR	4 BAR	5 BAR	6 BAR	Geräuschdämpfung Diff.
560-1	1/8	33,0	30,0	31,0	34,0	33,5	32,6	
560-2	1/4	41,0	36,0	42,0	39,0	36,0	34,0	
560-3	3/8	27,0	32,0	25,0	32,2	30,0	28,0	
560-4	1/2	27,0	27,0	23,0	20,0	21,0	19,0	
560-5	3/4	27,0	25,0	24,0	22,0	20,0	17,0	
560-6	1	18,0	22,0	20,0	18,0	16,0	14,0	

