

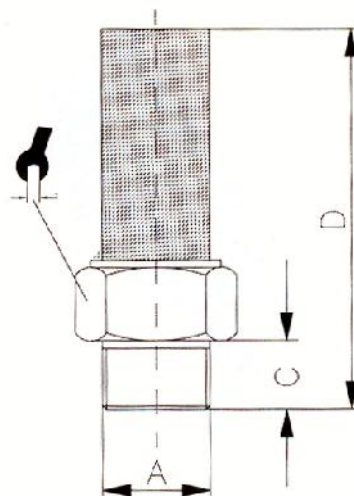
Werkstoff 1.4401

Betriebsdruck:
Betriebstemperatur:

max. 12,0 bar
-10 °C bis +400 °C



562-2 ES



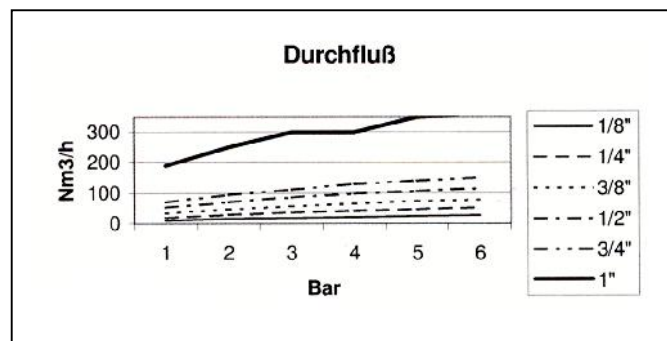
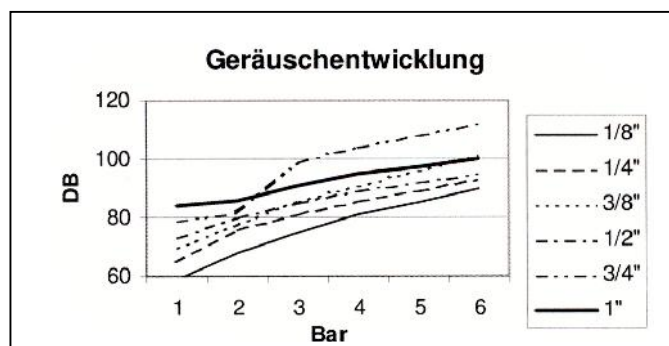
Art.-Nr.	A	C	D	SW
562-0 ES	M 5	3,5	16,0	8
562-1 ES	G 1/8	6,0	25,0	13
562-2 ES	G 1/4	8,0	33,0	16
562-3 ES	G 3/8	9,0	40,0	19
562-4 ES	G 1/2	10,0	47,0	24

Art.-Nr.	Gewinde	1 BAR	2 BAR	3 BAR	4 BAR	5 BAR	6 BAR	mit Schalldämpfer in DB
562-0 ES	M 5	53,0	64,0	72,0	77,0	81,0	85,0	
562-1 ES	G 1/8	59,0	68,0	75,0	81,0	85,0	90,0	
562-2 ES	G 1/4	65,0	76,0	81,0	86,0	89,0	93,0	
562-3 ES	G 3/8	70,0	78,0	86,0	91,0	96,0	101,0	
562-4 ES	G 1/2	73,0	80,0	85,0	89,0	92,0	95,0	

Art.-Nr.	Gewinde	1 BAR	2 BAR	3 BAR	4 BAR	5 BAR	6 BAR	Durchfluss in Nm ³ /h
562-0 ES	M 5	3,3	4,5	5,5	6,3	7,0	7,5	
562-1 ES	G 1/8	11,0	15,0	18,0	21,0	24,0	28,0	
562-2 ES	G 1/4	19,0	30,0	36,0	41,0	46,0	51,0	
562-3 ES	G 3/8	34,0	46,0	56,0	65,0	73,0	78,0	
562-4 ES	G 1/2	54,0	71,0	85,0	97,0	107,0	115,0	

Art.-Nr.	Gewinde	1 BAR	2 BAR	3 BAR	4 BAR	5 BAR	6 BAR	ohne Schalldämpfer in DB
562-0 ES	M 5	84,0	92,0	98,0	110,0	114,0	112,0	
562-1 ES	G 1/8	101,0	110,0	118,0	122,0	122,5	122,6	
562-2 ES	G 1/4	109,0	112,0	124,0	124,0	124,0	124,0	
562-3 ES	G 3/8	107,0	116,0	124,0	124,2	125,0	125,0	
562-4 ES	G 1/2	110,0	118,0	120,0	120,0	123,0	124,0	

Art.-Nr.	Gewinde	1 BAR	2 BAR	3 BAR	4 BAR	5 BAR	6 BAR	Geräuschdämpfung Diff.
562-0 ES	M 5	31,0	28,0	26,0	33,0	33,0	27,0	
562-1 ES	G 1/8	42,0	42,0	43,0	41,0	37,5	32,6	
562-2 ES	G 1/4	44,0	36,0	43,0	38,0	35,0	31,0	
562-3 ES	G 3/8	37,0	38,0	38,0	33,2	29,0	24,0	
562-4 ES	G 1/2	37,0	38,0	35,0	31,0	31,0	29,0	

**Abteilung ZeDok**

Tel. 07125/949741, 949742, 949753

Fax. 07125/949799

e-mail: zedok@riegler.de

Ausgabe 06/2009 Technische Änderungen vorbehalten.

Riegler & Co. KG, Druckluft-Armaturen