



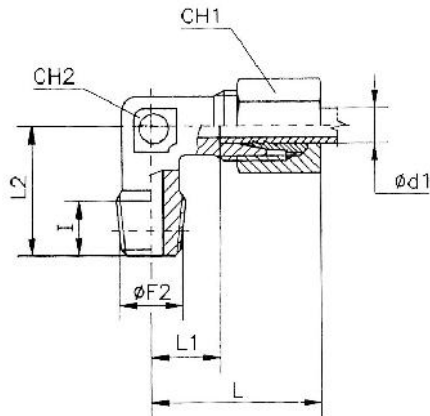

V 93

Winkel-Einschraubverschraubung, Außengewinde konisch nach ISO 7-1


Artikel-Nr.	Rohr- Außen- Ø	PN	Ø F2 Gewinde R	I	L	L1	L2	CH1	CH2
V 85	4,0	100	1/8	8,0	21,0	11,0	17,0	10	9
V 86	5,0	100	1/8	8,0	21,0	9,5	17,0	12	9
V 87	6,0	100	1/8	8,0	21,0	9,5	17,0	12	9
V 88	8,0	100	1/8	8,0	23,0	11,5	20,0	14	12
V 90	6,0	315	1/8	8,0	27,0	12,0	20,0	14	12
V 91	8,0	315	1/8	8,0	29,0	14,0	26,0	17	12
V 92	6,0	315	1/4	12,0	29,0	14,0	26,0	14	12
V 93	8,0	315	1/4	12,0	29,0	14,0	26,0	17	12
V 94	10,0	315	1/4	12,0	30,0	15,0	27,0	19	14
V 95	12,0	315	1/4	12,0	32,0	17,0	28,0	22	17
V 97	8,0	315	3/8	12,0	32,0	17,0	28,0	17	17
V 98	10,0	315	3/8	12,0	32,0	17,0	28,0	19	17
V 99	12,0	315	3/8	12,0	32,0	17,0	28,0	22	17
V 100	15,0	315	3/8	12,0	36,0	21,0	34,0	27	19
V 101	10,0	315	1/2	14,0	36,0	21,0	34,0	19	19
V 102	12,0	315	1/2	14,0	36,0	21,0	34,0	22	19
V 103	15,0	315	1/2	14,0	36,0	21,0	34,0	27	19
V 104	18,0	315	1/2	14,0	40,0	23,5	36,0	32	24
V 106	22,0	160	3/4	16,0	44,0	27,5	42,0	36	27

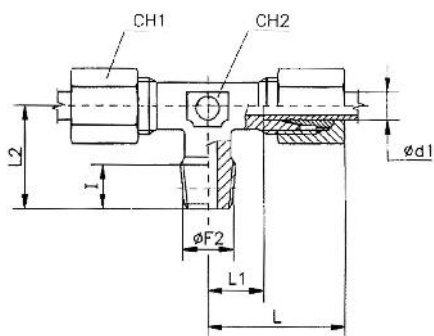

V 113

T-Einschraubverschraubung, Außengewinde konisch nach ISO 7-1


Artikel-Nr.	Rohr- Außen- Ø	PN	Ø F2 Gewinde R	I	L	L1	L2	CH1	CH2
V 110	4,0	100	1/8	8,0	21,0	11,0	17,0	10	9
V 112	6,0	100	1/8	8,0	21,0	9,5	17,0	12	9
V 113	8,0	100	1/8	8,0	23,0	11,5	20,0	14	12
V 116	6,0	630	1/4	12,0	31,0	16,0	26,0	17	12
V 117	8,0	315	1/4	12,0	29,0	14,0	26,0	17	12
V 118	10,0	315	1/4	12,0	30,0	15,0	27,0	19	14
V 121	12,0	315	3/8	12,0	32,0	17,0	28,0	22	17
V 125	15,0	315	1/2	14,0	36,0	21,0	34,0	27	19
V 126	18,0	315	1/2	14,0	40,0	23,5	36,0	32	24
V 127	22,0	160	3/4	16,0	44,0	27,5	42,0	36	27

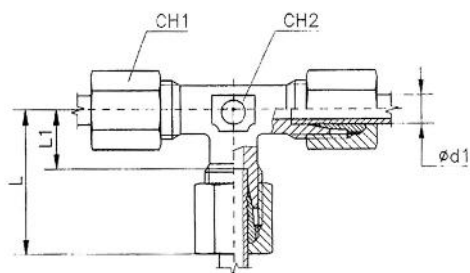

V 136

T-Verschraubung

Artikel-Nr.	Rohr- Außen- Ø	PN	L	L1	CH1	CH2
V 130	4,0	100	21,0	11,0	10	9
V 131	5,0	100	21,0	9,5	12	9
V 132	6,0	100	21,0	9,5	12	9
V 133	8,0	100	23,0	11,5	14	12
V 135	6,0	315	27,0	12,0	14	12
V 136	8,0	315	29,0	14,0	17	12
V 137	10,0	315	30,0	15,0	19	14
V 138	12,0	315	32,0	17,0	22	17
V 139	15,0	315	36,0	21,0	27	19
V 140	18,0	315	40,0	23,5	32	24
V 141	22,0	160	44,0	27,5	36	27

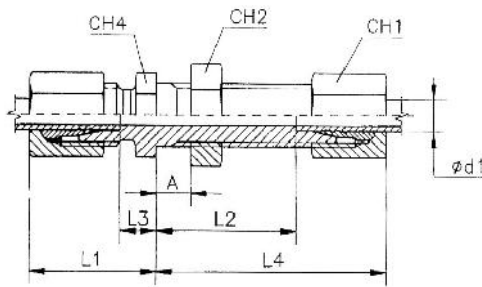


V 172

Gerade Schottverschraubung

Artikel-Nr.	Rohr-Außen-Ø	PN	L1	L2	L3	L4	CH1	CH2*	CH4
V 170	6,0	315	22,0	27,0	7,0	42,0	14	17	17
V 171	8,0	315	23,0	27,0	8,0	42,0	17	19	19
V 172	10,0	315	25,0	28,0	10,0	43,0	19	22	22
V 173	12,0	315	25,0	29,0	10,0	44,0	22	24	24
V 174	15,0	315	27,0	31,0	12,0	46,0	27	30	27
V 175	18,0	315	30,0	32,5	13,5	49,0	32	36	32
V 176	22,0	160	33,0	34,5	16,5	51,0	36	41	36

*Sechskantschlüssel gemäß DIN 80705

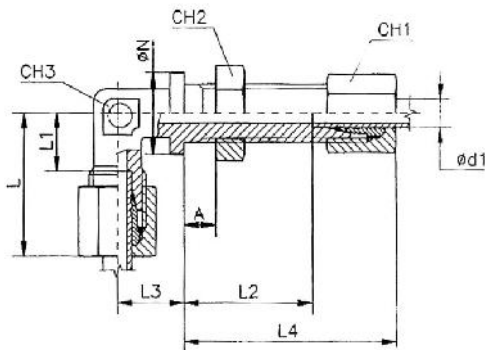


V 182

Winkel-Schottverschraubung

Artikel-Nr.	Rohr-Außen-Ø	PN	L	L1	L2	L3	L4	Ø N	CH1	CH2*	CH3
V 180	6,0	315	27,0	12,0	27,0	14,0	42,0	17,0	14	17	12
V 181	8,0	315	29,0	14,0	27,0	17,0	42,0	19,0	17	19	12
V 182	10,0	315	30,0	15,0	28,0	18,0	43,0	22,0	19	22	14
V 183	12,0	315	32,0	17,0	29,0	20,0	44,0	24,0	22	24	17
V 184	15,0	315	36,0	21,0	31,0	23,0	46,0	27,0	27	30	19

*Sechskantschlüssel gemäß DIN 80705

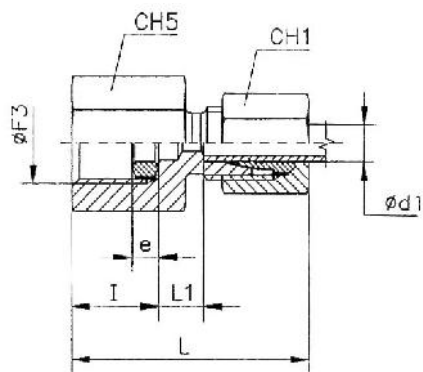


V 201

Manometer-Anschlussverschraubung, Innengewinde zylindrisch

Artikel-Nr.	Rohr-Außen-Ø	PN	Ø F3	L	L1	CH1	CH5	e*	I
V 200	6,0	315	1/4	37,0	7,5	14	19	4,5	14,5
V 201	8,0	315	1/4	37,0	7,5	17	19	4,5	14,5
V 202	10,0	315	1/4	38,0	8,5	19	19	4,5	14,5
V 203	12,0	315	1/4	38,0	8,5	22	19	4,5	14,5
V 205	6,0	630	1/2	46,0	11,0	17	27	5,0	20,0
V 206	8,0	630	1/2	46,0	11,0	19	27	5,0	20,0
V 207	10,0	630	1/2	47,0	10,5	22	27	5,0	20,0
V 208	12,0	630	1/2	47,0	10,5	24	27	5,0	20,0


*Dichtring mit Einschnittkante

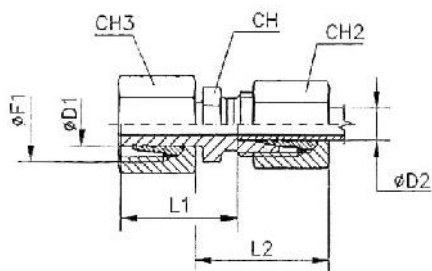

V 212-VM

Reduzierungen


Artikel-Nr.	Ø D1	Ø D2	PN	L1	L2	CH2	CH3	Ø F1	CH
V 210-VM	8,0	6,0	315	29,5	30,0	14	17	14x1,5	14
V 211-VM	10,0	6,0	315	29,5	30,0	14	19	16x1,5	14
V 212-VM	10,0	8,0	315	29,5	30,0	17	19	16x1,5	17
V 213-VM	12,0	6,0	315	29,5	30,0	14	22	18x1,5	14
V 214-VM	12,0	8,0	315	29,5	30,0	17	22	18x1,5	17
V 215-VM	12,0	10,0	315	31,0	31,0	19	22	18x1,5	17
V 216-VM	15,0	6,0	315	29,5	29,0	14	27	22x1,5	17
V 217-VM	15,0	8,0	315	29,5	29,0	17	27	22x1,5	17
V 218-VM	15,0	10,0	315	31,0	30,0	19	27	22x1,5	17
V 219-VM	15,0	12,0	315	31,0	30,0	22	27	22x1,5	19



V 353

Schneidringe

Artikel-Nr.	Rohr- Außen-Ø	PN	Ø F1	Ø G	A	M	CH
V 350	4,0	100	8x1	4,0	11,0	6,0	10
V 351	5,0	100	10x1	5,0	11,5	7,0	12
V 352	6,0	100	10x1	6,0	11,5	7,0	12
V 353	8,0	100	12x1	8,0	12,0	7,0	14
V 360	6,0	315	12x1,5	6,0	14,5	9,5	14
V 361	8,0	315	14x1,5	8,0	14,5	9,5	17
V 362	10,0	315	16x1,5	10,0	15,5	10,0	19
V 363	12,0	315	18x1,5	12,0	15,5	10,0	22
V 364	15,0	315	22x1,5	15,0	17,0	10,0	27
V 365	18,0	315	26x1,5	18,0	18,0	10,5	32
V 366	22,0	160	30x2	22,0	20,0	11,0	36



V 403

Überwurfmuttern

Artikel-Nr.	Rohr- Außen-Ø	PN	Ø F1	Ø G	A	M	CH
V 400	4,0	100	8x1	4,0	11,0	6,0	10
V 401	5,0	100	10x1	5,0	11,0	7,0	12
V 402	6,0	100	10x1	6,0	11,0	7,0	12
V 403	8,0	100	12x1	8,0	12,0	7,0	14
V 405	6,0	315	12x1,5	6,0	14,0	9,5	14
V 406	8,0	315	14x1,5	8,0	14,0	9,5	17
V 407	10,0	315	16x1,5	10,0	15,0	10,0	19
V 408	12,0	315	18x1,5	12,0	15,0	10,0	22
V 409	15,0	315	22x1,5	15,0	17,0	10,0	27
V 410	18,0	315	26x1,5	18,0	18,0	10,5	32
V 411	22,0	160	30x2	22,0	20,0	11,0	36

Baumaße sind Circa-Maße bei angezogener Überwurfmutter.

Abteilung ZeDok

Tel. 07125/949741, 949742, 949753

Fax. 07125/949799

e-mail: zedok@riegler.de

Ausgabe 02/2013 Technische Änderungen vorbehalten.

Riegler & Co. KG, Druckluft-Armaturen