


Einschraubschlauchtüllen

Material: Messing vernickelt
 Gewinde: mit zylindrischen Außengewinden
 Medien: für Luft, Wasser, Öl, Dampf etc.
 Betriebstemperatur: max. 150 °C
 Druck: max. 60,0 bar

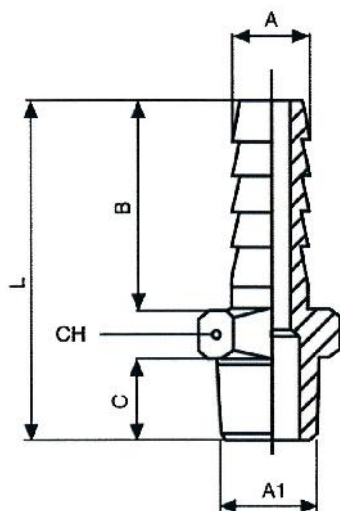

239.107

Einschraubschlauchtüllen, Außengewinde konisch nach ISO 7-1

Art.-Nr.	A	A1	B	C	L	CH
239.101	6,0	R 1/8	19,0	8,0	31,5	12
239.102	8,0	R 1/8	19,0	8,0	31,5	12
239.103	9,0	R 1/8	19,0	8,0	31,5	12
239.104	10,0	R 1/8	20,0	8,0	32,5	12
239.105	6,0	R 1/4	19,0	11,0	35,0	14
239.106	8,0	R 1/4	19,0	11,0	35,0	14
239.107	9,0	R 1/4	19,0	11,0	35,0	14
239.108	10,0	R 1/4	20,0	11,0	36,0	14
239.109	12,0	R 1/4	20,0	11,0	36,0	14
239.110	9,0	R 3/8	19,0	11,5	35,5	17
239.111	10,0	R 3/8	20,0	11,5	36,5	17
239.112	12,0	R 3/8	20,0	11,5	36,5	17
239.113	9,0	R 1/2	19,0	14,0	38,5	22
239.114	10,0	R 1/2	20,0	14,0	39,5	22
239.115	12,0	R 1/2	20,0	14,0	39,5	22