


- aus Kunststoff (POM) blau -

Betriebsdruck: 0 – 10,0 bar
Temperaturbereich: -10 °C bis +60 °C




11.653

Gerade Einschraubverschraubung, Außengewinde

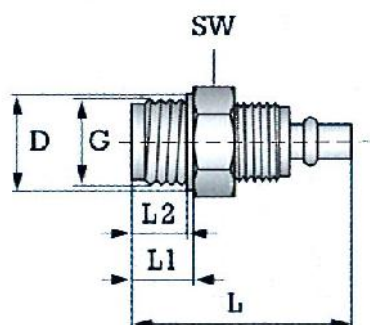

Art.-Nr.	Gewinde	für Schlauch	NW mm	SW	D	L	L ₁	L ₂
11.651	G 1/8	6/4	3,0	13	11,0	28,0	7,0	6,0
11.652	G 1/8	8/6	4,5	13	11,0	29,5	7,0	6,0
11.653	G 1/4	6/4	3,0	17	14,5	31,0	9,0	8,0
11.654	G 1/4	8/6	4,5	17	14,5	32,0	9,0	8,0
11.655	G 1/4	12/9	7,0	17	16,0	37,5	9,0	8,0
11.656	G 1/4	10/8	6,5	17	14,5	34,0	9,0	8,0
11.657	G 3/8	8/6	4,5	19	18,5	34,0	11,0	10,0
11.658	G 3/8	10/8	6,5	19	18,5	35,5	11,0	10,0
11.659	G 3/8	12/9	7,0	19	18,5	37,5	11,0	10,0

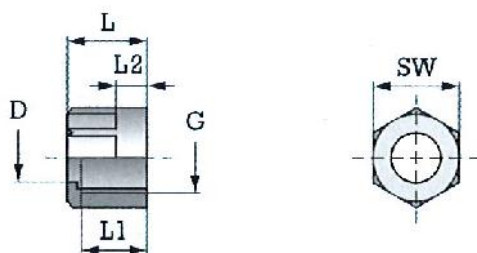

Art.-Nr.	für Schlauch	Gewinde	SW	D	L	L ₁	L ₂
11.651, 11.653	6/4	M 10x1	12	6,2	13,0	10,5	5,0
11.652, 11.654, 11.657	8/6	M 12x1	14	8,2	13,0	10,5	5,0
11.656, 11.658	10/8	M 14x1	17	10,2	13,0	11,0	6,0
11.655, 11.659	12/9	M 16x1	19	12,4	14,0	11,5	6,0