


- aus Kunststoff (POM) blau -

Betriebsdruck: 0 – 10,0 bar
Temperaturbereich: -10 °C bis +60 °C




13.665


Winkelverschraubung mit Alu-Hohlschraube, drehbar

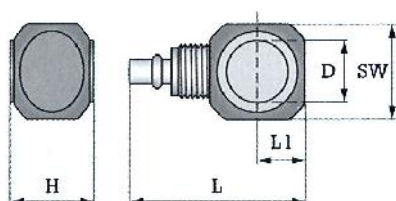

Art.-Nr.	Gewinde	für Schlauch	NW mm	SW	D	L	L ₁	H
13.660	G 1/8	6/4	3,0	16	10,0	31,0	8,0	16,5
13.661	G 1/8	8/6	4,5	16	10,0	33,0	8,0	16,5
13.665	G 1/4	6/4	3,0	20	13,0	35,0	10,0	16,5
13.666	G 1/4	8/6	4,5	20	13,0	36,5	10,0	16,5

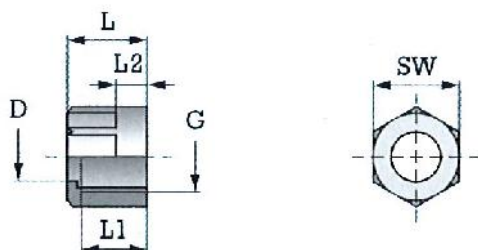

Art.-Nr.	für Schlauch	Gewinde	SW	D	L	L ₁	L ₂
13.660, 13.661	6/4	M 10x1	12	6,2	13,0	10,5	5,0
13.665, 13.666	8/6	M 12x1	14	8,2	13,0	10,5	5,0



Art.-Nr.	Gewinde	L	L ₁	L ₂	SW	Werkstoff
13.660, 13.661	G 1/8	27,0	8,0	8,0	14	Alu eloxiert blau
13.665, 13.666	G 1/4	29,0	10,0	8,0	17	Alu eloxiert blau