


- aus Kunststoff (POM) blau -

Betriebsdruck: 0 – 10,0 bar  
Temperaturbereich: -10 °C bis +60 °C




14.815


**T-Verschraubung** mit Alu-Hohlschraube, drehbar

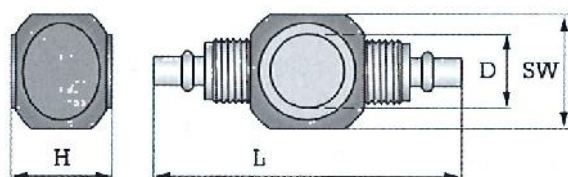

| Art.-Nr. | Gewinde | für Schlauch | NW mm | SW | D    | L    | H    |
|----------|---------|--------------|-------|----|------|------|------|
| 14.811   | G 1/8   | 6/4          | 3     | 16 | 10,0 | 47,0 | 16,5 |
| 14.812   | G 1/8   | 8/6          | 5     | 16 | 10,0 | 49,0 | 16,5 |
| 14.815   | G 1/4   | 6/4          | 3     | 20 | 13,0 | 51,0 | 16,5 |
| 14.816   | G 1/4   | 8/6          | 5     | 20 | 13,0 | 53,0 | 16,5 |

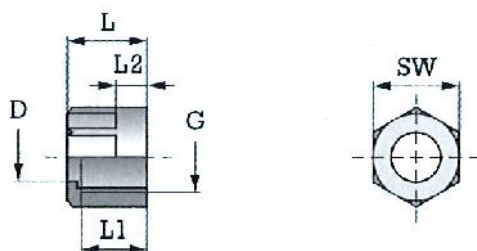

| Art.-Nr.       | für Schlauch | Gewinde | SW | D   | L    | L <sub>1</sub> | L <sub>2</sub> |
|----------------|--------------|---------|----|-----|------|----------------|----------------|
| 14.811, 14.815 | 6/4          | M 10x1  | 12 | 6,2 | 13,0 | 10,5           | 5,0            |
| 14.812, 14.816 | 8/6          | M 12x1  | 14 | 8,2 | 13,0 | 10,5           | 5,0            |



| Art.-Nr.       | Gewinde | L    | L <sub>1</sub> | L <sub>2</sub> | SW | Werkstoff         |
|----------------|---------|------|----------------|----------------|----|-------------------|
| 14.811, 14.812 | G 1/8   | 27,0 | 8,0            | 8,0            | 14 | Alu eloxiert blau |
| 14.815, 14.816 | G 1/4   | 29,0 | 10,0           | 8,0            | 17 | Alu eloxiert blau |