


- aus Kunststoff (POM) blau -

Betriebsdruck: 0 – 10,0 bar
Temperaturbereich: -10 °C bis +60 °C




14.912

T-Verbinder, starr

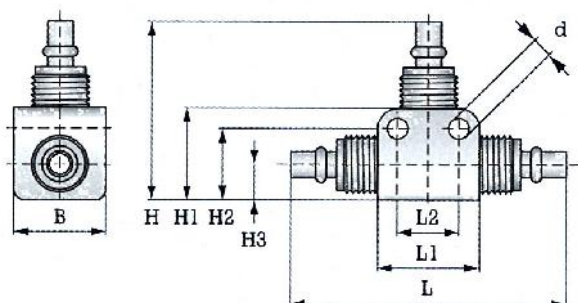

Artikel-Nr.	für Schlauch	NW mm	L	L ₁	L ₂	B	d	H	H ₁	H ₂	H ₃
14.911	6/4	3	52,0	20,0	12,0	15,0	4,3	32,0	16,0	12,0	6,0
14.912	8/6	5	52,0	20,0	12,0	18,0	4,3	34,0	18,0	14,0	8,0
14.913	12/9	7	63,0	25,0	15,5	22,0	4,3	40,0	21,0	16,5	8,0

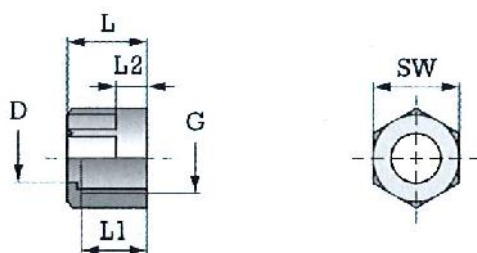

Artikel-Nr.	für Schlauch	Gewinde	SW	D	L	L ₁	L ₂
14.911	6/4	M 10x1	12	6,2	13,0	10,5	5,0
14.912	8/6	M 12x1	14	8,2	13,0	10,5	5,0
14.913	12/9	M 16x1	19	12,4	14,0	11,5	6,0