


- aus Kunststoff (POM) blau -

Betriebsdruck: 0 – 10,0 bar
Temperaturbereich: -10 °C bis +60 °C




15.886

Schottverbinder komplett mit Befestigungsmutter

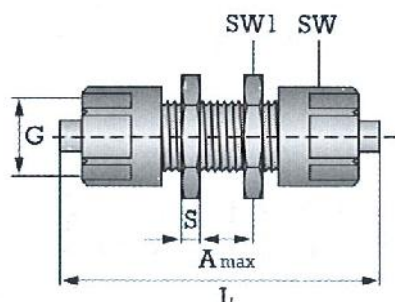

Artikel-Nr.	Gewinde	für Schlauch	NW mm	L	A _{max}	SW	SW ₁	S
15.885	M 10x1	6/4	3	50,0	10,0	12	13	3,0
15.886	M 12x1	8/6	4	51,0	10,0	14	17	3,0
15.888	M 16x1	12/9	7	60,0	10,0	19	19	4,0

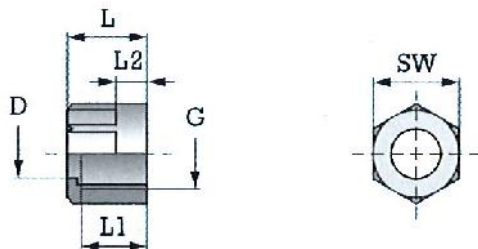

Artikel-Nr.	für Schlauch	Gewinde	SW	D	L	L ₁	L ₂
15.885	6/4	M 10x1	12	6,2	13,0	10,5	5,0
15.886	8/6	M 12x1	14	8,2	13,0	10,5	5,0
15.888	12/9	M 16x1	19	12,4	14,0	11,5	6,0

Befestigungsmutter für Schottverbinder

Artikel-Nr.	für Schlauch	Gewinde	S
15.885	6/4	M 10x1	3,0
15.886	8/6	M 12x1	3,0
15.888	12/9	M 16x1	4,0