


- aus Kunststoff (POM) blau -

Betriebsdruck: 0 – 10,0 bar
Temperaturbereich: -10 °C bis +60 °C



16/13

Klemm-Mutter

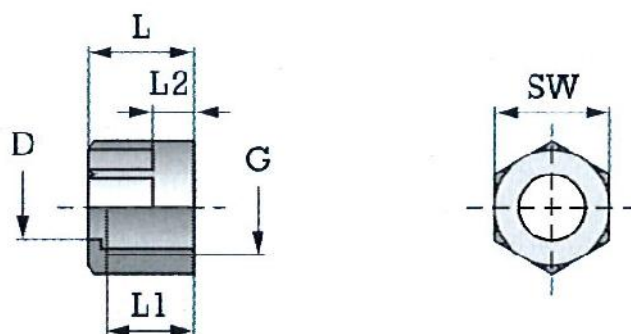

Art.-Nr.	für Schlauch	Gewinde	SW	D	L	L ₁	L ₂
16/12	6/4	M 10x1	12	6,2	13,0	10,5	5,0
16/13	8/6	M 12x1	14	8,2	13,0	10,5	5,0
16/14	12/9	M 16x1	19	12,4	14,0	11,5	6,0
16/15	10/8	M 14x1	17	10,2	13,0	11,0	6,0