


Material: Messing vernickelt  
max. Betriebsdruck: 18,0 bar  
verwendbare Schläuche: PA, PE, PU

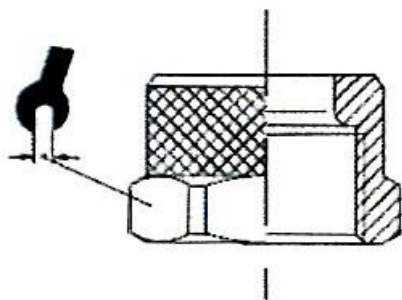

16.012-8-E

### Überwurfmuttern

| Artikel-Nr. | ØD    | A        | B    |  |
|-------------|-------|----------|------|---------------------------------------------------------------------------------------|
| 16.007-5-E  | 5/3   | M 7x0,75 | 8,5  | 8                                                                                     |
| 16.010-6-E  | 6/4   | M 10x1   | 10,5 | 12                                                                                    |
| 16.012-8-E  | 8/6   | M 12x1   | 10,5 | 14                                                                                    |
| 16.014-10-E | 10/8  | M 14x1   | 11,5 | 16                                                                                    |
| 16.016-12-E | 12/10 | M 16x1   | 13,0 | 18                                                                                    |