


Ausführung mit zylindrischem Gewinde und Weichdichtung aus NBR


Temperaturbereich: -35 °C bis +100 °C

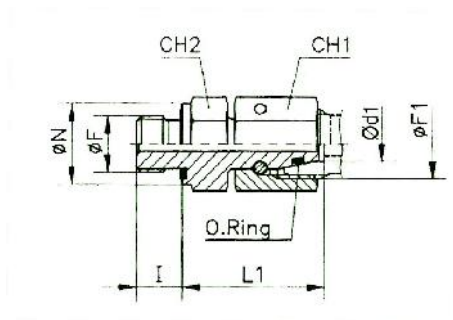

V 503

Einstellbare gerade Einschraubverschraubung mit Dichtkegel, 360° drehbar


Artikel-Nr.	Rohr-Außen-Ø	PN	L1	Ø F	I	CH2	Ø N	Ø F1	CH1	O-Ring (Shore A ca. 90)
V 501	6,0	315	24,5	1/8	8,0	14	14,0	12x1,5	14	4,0x1,5
V 502	8,0	315	29,5	1/4	12,0	19	19,0	14x1,5	17	6,0x1,5
V 503	10,0	315	27,5	1/4	12,0	19	19,0	16x1,5	19	7,5x1,5
V 504	12,0	315	34,0	3/8	12,0	22	22,0	18x1,5	22	9,0x1,5
V 505	15,0	315	32,0	1/2	14,0	27	27,0	22x1,5	27	12,0x2,0
V 506	18,0	315	31,5	1/2	14,0	27	27,0	26x1,5	32	15,0x2,0
V 507	22,0	160	32,5	3/4	16,0	32	32,0	30x2,0	36	20,0x2,0

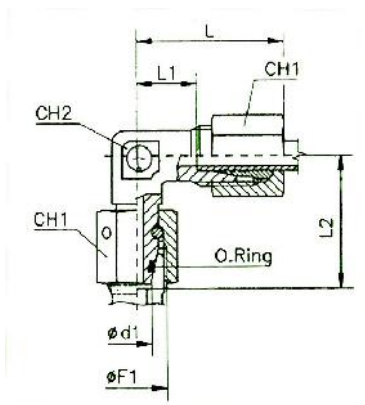

V 513

Einstellbare Winkelverschraubung mit Dichtkegel, 360° drehbar


Artikel-Nr.	Rohr- Außen- Ø	PN	L	L1	L2	Ø F1	CH1	CH2	O-Ring (Shore A ca. 90)
V 511	6	315	27,0	12,0	26,0	12x1,5	14	12	4,0x1,5
V 512	8	315	29,0	14,0	27,5	14x1,5	17	12	6,0x1,5
V 513	10	315	30,0	15,0	29,0	16x1,5	19	14	7,5x1,5
V 514	12	315	32,0	17,0	29,5	18x1,5	22	17	9,0x1,5
V 515	15	315	36,0	21,0	32,5	22x1,5	27	19	12,0x2,0
V 516	18	315	40,0	23,5	35,5	26x1,5	32	24	15,0x2,0
V 517	22	160	44,0	27,5	38,5	30x2,0	36	27	20,0x2,0

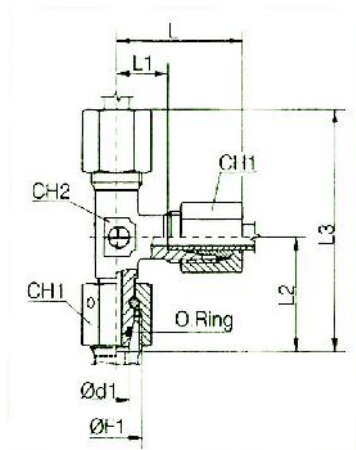

V 523

Einstellbare L-Verschraubung mit Dichtkegel, 360° drehbar


Artikel-Nr.	Rohr- Außen- Ø	PN	L	L1	L2	L3	Ø F1	CH1	CH2	O-Ring (Shore A ca. 90)
V 521	6,0	315	27,0	12,0	26,0	53,0	12x1,5	14	12	4,0x1,5
V 522	8,0	315	29,0	14,0	27,5	56,0	14x1,5	17	12	6,0x1,5
V 523	10,0	315	30,0	15,0	29,0	59,0	16x1,5	19	14	7,5x1,5
V 524	12,0	315	32,0	17,0	29,5	61,0	18x1,5	22	17	9,0x1,5
V 525	15,0	315	36,0	21,0	32,5	69,0	22x1,5	27	19	12,0x2,0
V 526	18,0	315	40,0	23,5	35,5	75,0	26x1,5	32	24	15,0x2,0
V 527	22,0	160	44,0	27,5	38,5	82,0	30x2,0	36	27	20,0x2,0

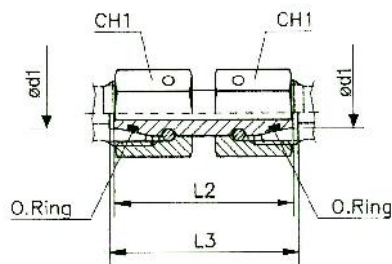

V 533

Einstellbare gerade Verschraubung mit Dichtkegel, 360° drehbar


Artikel-Nr.	Rohr-Außen-Ø	PN	L2	L3	CH1	O-Ring (Shore A ca. 90)
V 531	6,0	315	34,0	35,0	14	4,0x1,5
V 532	8,0	315	34,0	35,0	17	6,0x1,5
V 533	10,0	315	36,0	37,0	19	7,5x1,5
V 534	12,0	315	36,0	37,0	22	9,0x1,5
V 535	15,0	315	39,0	40,0	27	12,0x2,0
V 536	18,0	315	40,5	41,5	32	15,0x2,0
V 537	22,0	160	45,0	46,0	36	20,0x2,0

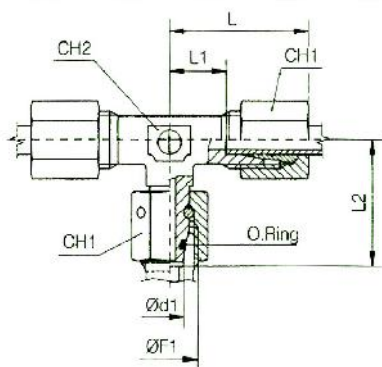

V 543

Einstellbare T-Verschraubung mit Dichtkegel, 360° drehbar


Artikel-Nr.	Rohr-Außen-Ø	PN	L	L1	L2	Ø F1	CH1	CH2	O-Ring (Shore A ca. 90)
V 541	6,0	315	27,0	12,0	26,0	12x1,5	14	12	4,0x1,5
V 542	8,0	315	29,0	14,0	27,5	14x1,5	17	12	6,0x1,5
V 543	10,0	315	30,0	15,0	29,0	16x1,5	19	14	7,5x1,5
V 544	12,0	315	32,0	17,0	29,5	18x1,5	22	17	9,0x1,5
V 545	15,0	315	36,0	21,0	32,5	22x1,5	27	19	12,0x2,0
V 546	18,0	315	40,0	23,5	35,5	26x1,5	32	24	15,0x2,0
V 547	22,0	160	44,0	27,5	38,5	30x2,0	36	27	20,0x2,0

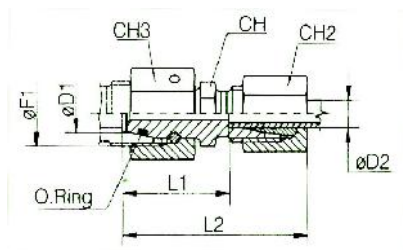

V 557

Reduzierschraubung mit Dichtkegel

Artikel-Nr.	Rohr- Außen- Ø 1	Rohr- Außen- Ø 2	PN	L1	L2	CH2	CH3	Ø F1	CH	O-Ring (Shore A ca. 90)
V 551	8,0	6,0	315	23,5	38,0	14	17	14x1,5	12	6,0x1,5
V 552	10,0	6,0	315	25,0	40,0	14	19	16x1,5	14	7,5x1,5
V 553	12,0	6,0	315	25,0	40,0	14	22	18x1,5	17	9,0x1,5
V 554	15,0	6,0	315	28,5	43,0	14	27	22x1,5	19	12,0x2,0
V 555	18,0	6,0	315	28,0	43,0	14	32	26x1,5	24	15,0x2,0
V 556	22,0	6,0	160	32,0	47,0	14	36	30x2,0	27	20,0x2,0
V 557	10,0	8,0	315	25,0	40,0	17	19	16x1,5	14	7,5x1,5
V 558	12,0	8,0	315	25,0	40,0	17	22	18x1,5	17	9,0x1,5
V 559	15,0	8,0	315	28,5	43,0	17	27	22x1,5	19	12,0x2,0
V 560	18,0	8,0	315	28,0	43,0	17	32	26x1,5	24	15,0x2,0
V 561	22,0	8,0	160	32,0	47,0	17	36	30x2,0	27	20,0x2,0
V 562	12,0	10,0	315	26,0	41,0	19	22	18x1,5	17	9,0x1,5
V 563	15,0	10,0	315	29,5	44,0	19	27	22x1,5	19	12,0x2,0
V 564	18,0	10,0	315	29,0	44,0	19	32	26x1,5	24	15,0x2,0
V 565	22,0	10,0	160	33,0	48,0	19	36	30x2,0	27	20,0x2,0
V 566	15,0	12,0	315	29,5	44,0	22	27	22x1,5	19	12,0x2,0
V 567	18,0	12,0	315	29,0	44,0	22	32	26x1,5	24	15,0x2,0
V 568	22,0	12,0	160	33,0	48,0	22	36	30x2,0	27	20,0x2,0
V 569	18,0	15,0	315	30,0	45,0	27	32	26x1,5	24	15,0x2,0
V 570	22,0	15,0	160	34,0	49,0	27	36	30x2,0	27	20,0x2,0
V 571	22,0	18,0	160	33,5	50,0	32	36	30x2,0	27	20,0x2,0

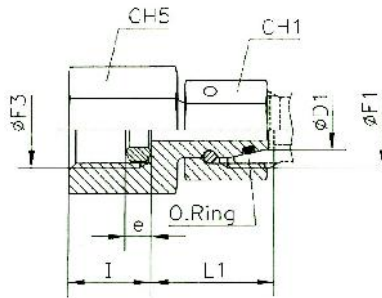

V 583

Manometer-Anschlussverschraubung mit Dichtkegel, Innengewinde zylindrisch

Artikel-Nr.	Rohr- Außen- Ø	PN	Ø F3	Ø F1	L1	CH1	CH5	e Dichtring mit Einschnittkante	I	O-Ring (Shore A ca. 90)
V 581	6,0	315	1/4	12x1,5	21,0	14	19	4,5	14,5	4,0x1,5
V 582	8,0	315	1/4	14x1,5	21,5	17	19	4,5	14,5	6,0x1,5
V 583	10,0	315	1/4	16x1,5	22,0	19	19	4,5	14,5	7,5x1,5
V 584	12,0	315	1/4	18x1,5	22,0	22	19	4,5	14,5	9,5x1,5

Baumaße sind Circa-Maße bei angezogener Überwurfmutter.