


Material:	Messing blank
Arbeitsdruck:	10,0 bar
Mediumstemperatur:	max. 90 °C
Umgebungstemperatur:	max. 90 °C
Gewinde:	DIN ISO 228

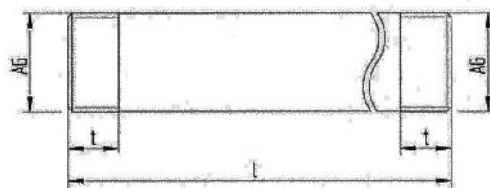

LN 1280


Rohrnippel in Langausführung, Messing blank

Artikel-Nr.	Gewinde G außen	Länge mm	t mm
LN 1230	1/2	30,0	15,0
LN 1240	1/2	40,0	15,0
LN 1250	1/2	50,0	15,0
LN 1260	1/2	60,0	15,0
LN 1280	1/2	80,0	15,0
LN 12100	1/2	100,0	15,0
LN 12120	1/2	120,0	15,0
LN 12150	1/2	150,0	15,0
LN 12180	1/2	180,0	15,0
LN 12200	1/2	200,0	15,0
LN 3440	3/4	40,0	15,0
LN 3460	3/4	60,0	15,0
LN 3480	3/4	80,0	15,0
LN 34100	3/4	100,0	15,0
LN 34120	3/4	120,0	15,0
LN 34150	3/4	150,0	15,0
LN 34180	3/4	180,0	15,0
LN 34200	3/4	200,0	15,0
LN 10040	1	40,0	17,0
LN 10060	1	60,0	17,0
LN 10080	1	80,0	17,0
LN 100100	1	100,0	17,0
LN 100120	1	120,0	17,0
LN 100150	1	150,0	17,0
LN 100180	1	180,0	17,0
LN 100200	1	200,0	17,0

Artikel-Nr.	Gewinde G außen	Länge mm	t mm
LN 11460	1 1/4	60,0	19,0
LN 11480	1 1/4	80,0	19,0
LN 114100	1 1/4	100,0	19,0
LN 114120	1 1/4	120,0	19,0
LN 114150	1 1/4	150,0	19,0
LN 114180	1 1/4	180,0	19,0
LN 114200	1 1/4	200,0	19,0
LN 11260	1 1/2	60,0	19,0
LN 11280	1 1/2	80,0	19,0
LN 112100	1 1/2	100,0	19,0
LN 112120	1 1/2	120,0	19,0
LN 112150	1 1/2	150,0	19,0
LN 112200	1 1/2	200,0	19,0
LN 20060	2	60,0	23,5
LN 20080	2	80,0	23,5
LN 200100	2	100,0	23,5
LN 200120	2	120,0	23,5
LN 200150	2	150,0	23,5
LN 200200	2	200,0	23,5