


Material: Messing, vernickelt
Dichtmaterial: Buna-N
Arbeitsdruck: max. 18,0 bar

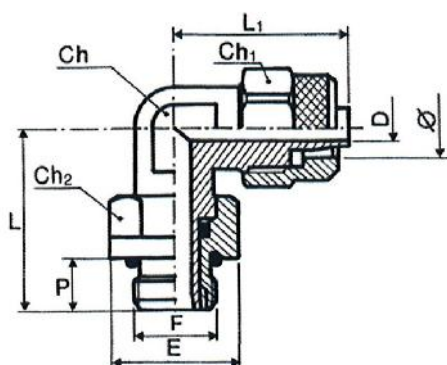

13.514-8

Winkeleinschraubverschraubung, drehbar, Außengewinde zylindrisch mit O-Ring

Art.-Nr.	Ø	F	Ch	Ch1	Gewinde Ch1	Ch2	P	E	L	L1	D
13.518-6	6/4	G 1/8	10	12	M 10x1	13	6,0	15,0	21,0	20,5	3,0
13.518-8	8/6	G 1/8	10	14	M 12x1	13	6,0	15,0	21,0	21,0	5,0
13.514-6	6/4	G 1/4	10	12	M 10x1	16	8,0	18,0	22,5	21,5	3,0
13.514-8	8/6	G 1/4	12	14	M 12x1	16	8,0	18,0	24,0	22,0	5,0
13.514-10	10/8	G 1/4	12	16	M 14x1	16	8,0	18,0	24,0	24,0	6,8