


Material: Messing, vernickelt
Dichtmaterial: Buna-N
Arbeitsdruck: max. 18,0 bar

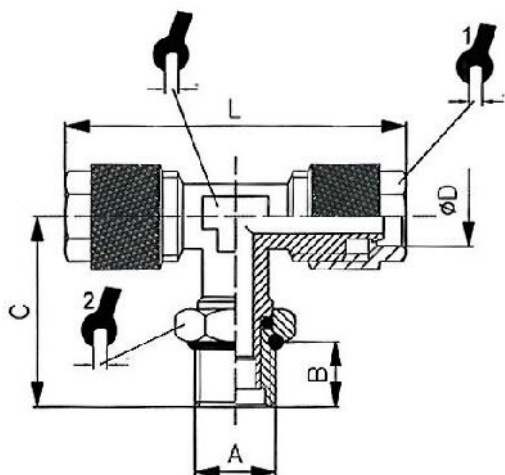

14.514-8

T-Einschraubverschraubung, drehbar, Außengewinde zylindrisch

Art.-Nr.	ØD	A	B	C	L	 1	Gewinde SW1	 2
14.518-6	6/4	G 1/8	6,0	22,0	41,2	10	M 10x1	13
14.518-8	8/6	G 1/8	6,0	20,5	46,5	14	M 12x1	14
14.514-6	6/4	G 1/4	8,0	26,0	41,2	10	M 10x1	16
14.514-8	8/6	G 1/4	8,0	27,5	43,2	12	M 12x1	16
14.514-10	10/8	G 1/4	8,0	27,5	48,0	14	M 14x1	16