


Schottverschraubung

Material: Messing vernickelt
Gewinde: mit zylindrischen Außengewinden
Medien: für Luft, Wasser, Öl, Dampf etc.
Betriebstemperatur: max. 150°C
Druck: max. 60,0 bar

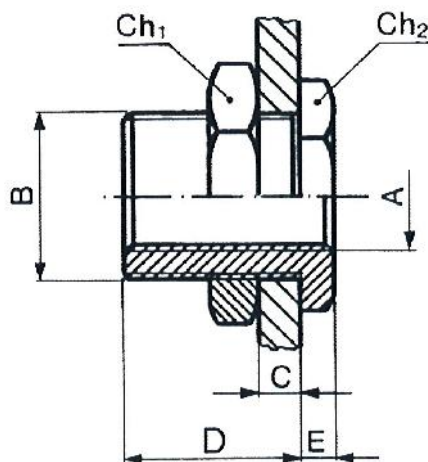

232.04-N

Schottverschraubung

Art.-Nr.	A	B	C _{max}	D	E	Ch ₁	Ch ₂
232.01-N	1/8	M 16x1,5	0	14,0	4,0	19	22
232.02-N	1/4	M 20x1,5	0	21,0	5,0	27	24
232.03-N	3/8	M 26x1,5	0	21,0	5,0	30	32
232.04-N	1/2	M 28x1,5	0	27,0	6,5	36	32