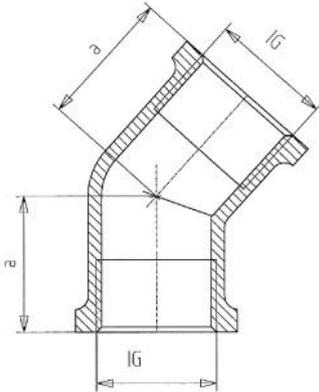



Betriebstemperatur:
 Betriebsdruck:

 max. 90 °C
 max. 10,0 bar


253.74

Winkelstück, 45°, innen/innen


Artikel-Nr.	Gewinde	a
253.73	G 3/8xG 3/8	21,5
253.74	G 1/2xG 1/2	25,0
253.75	G 3/4xG 3/4	30,0
253.76	G 1xG 1	33,0

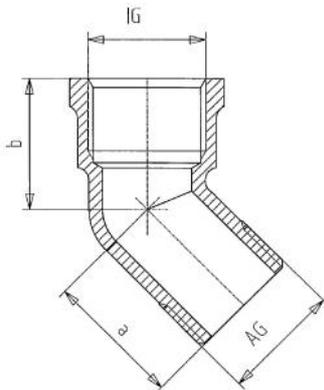

253.84

Winkelstück, 45°, innen/außen

Artikel-Nr.	Gewinde	a	b
253.83	G 3/8xG 3/8	16,0	18,5
253.84	G 1/2xG 1/2	30,5	22,5
253.85	G 3/4xG 3/4	30,5	29,5
253.86	G 1xG 1	37,0	29,0



253.95

T-Reduzierstücke, 3 x Innengewinde

Artikel-Nr.	G	G ₁	t	t ₁	l	L
253.94	1/2	3/8	12,5	10,0	26,0	51,0
253.95	3/4	1/2	16,0	14,0	27,0	60,0
253.96	1	1/2	19,0	15,0	32,0	67,0
253.97	1	3/4	15,5	15,0	34,0	67,0