


- Edelstahl 1.4408 -

Arbeitsdruck:
Innengewinde:
Außengewinde:

max. 20 bar
zylindrisch nach DIN EN ISO 228-1
zylindrisch nach DIN EN ISO 228-1

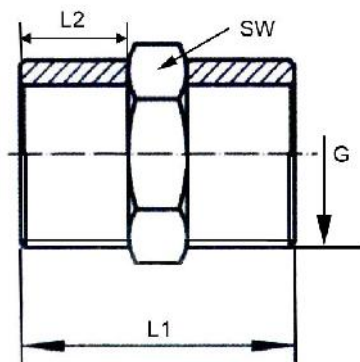

262.06-ES

Doppelnippel, 6-kant

Art.-Nr.	Gewinde G	SW	L1	L2
262.01-ES	1/8	13	30,0	12,0
262.02-ES	1/4	16	32,0	13,0
262.03-ES	3/8	20	34,0	13,0
262.04-ES	1/2	24	37,5	15,0
262.05-ES	3/4	29	46,0	18,0
262.06-ES	1	35	51,0	19,0
262.07-ES	1 1/4	46	57,0	22,0
262.08-ES	1 1/2	51	58,0	23,0
262.09-ES	2	63	66,9	26,0