


- Edelstahl 1.4408 -

Arbeitsdruck:
Innengewinde:
Außengewinde:

max. 20 bar
zylindrisch nach DIN EN ISO 228-1
zylindrisch nach DIN EN ISO 228-1

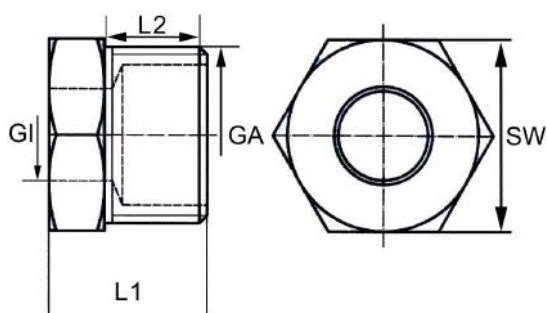

266.09-ES

Reduziernippel, 6-kant

Art.-Nr.	Außen- gewinde G	Innen- gewinde G	SW	L1	L2
266.01-ES	1/4	1/8	17	18,1	12,9
266.02-ES	3/8	1/8	21	19,0	14,0
266.03-ES	3/8	1/4	21	19,0	13,0
266.04-ES	1/2	1/4	25	22,0	15,6
266.05-ES	1/2	3/8	26	22,0	16,0
266.06-ES	3/4	3/8	30	24,7	15,8
266.07-ES	3/4	1/2	31	25,0	15,9
266.08-ES	1	1/2	37	29,0	20,0
266.09-ES	1	3/4	38	29,0	20,0
266.10-ES	1 1/4	3/4	46	30,0	22,4
266.11-ES	1 1/4	1	46	30,0	22,2
266.12-ES	1 1/2	1	53	32,0	23,0
266.13-ES	1 1/2	1 1/4	53	32,0	23,0
266.14-ES	2	1	63	36,0	26,0
266.15-ES	2	1 1/2	63	36,0	26,0