


- Edelstahl 1.4408 -

Arbeitsdruck:
Innengewinde:
Außengewinde:

max. 20 bar
zylindrisch nach DIN EN ISO 228-1
zylindrisch nach DIN EN ISO 228-1

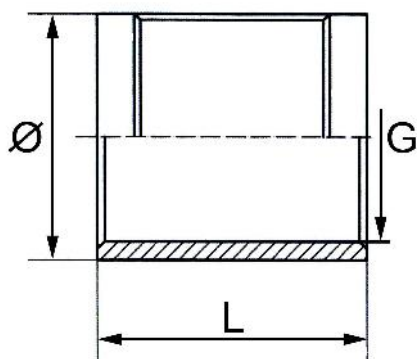

269.06-ES

Muffe, rund

Art.-Nr.	Gewinde G	Ø	L
269.01-ES	1/8	16,4	25,0
269.02-ES	1/4	19,9	25,4
269.03-ES	3/8	23,6	30,0
269.04-ES	1/2	27,7	35,0
269.05-ES	3/4	32,6	38,6
269.06-ES	1	40,4	43,9
269.07-ES	1 1/4	49,0	50,1
269.08-ES	1 1/2	56,0	53,6
269.09-ES	2	67,5	63,0