



- Edelstahl 1.4408 -

Arbeitsdruck:
 Innengewinde:
 Außengewinde:

max. 20 bar
 zylindrisch nach DIN EN ISO 228-1
 zylindrisch nach DIN EN ISO 228-1

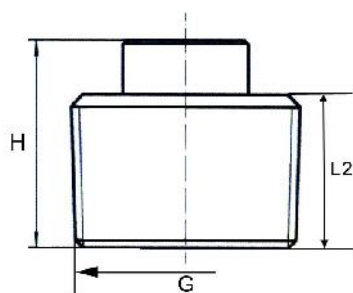

260.06-ES

Verschlussstopfen, 4-kant

Art.-Nr.	Gewinde G	H	L2	SW
260.01-ES	1/8	13,9	7,0	6
260.02-ES	1/4	19,4	11,2	9
260.03-ES	3/8	17,8	10,0	10
260.04-ES	1/2	25,0	15,8	14
260.05-ES	3/4	28,0	17,0	17
260.06-ES	1	31,0	19,0	19
260.07-ES	1 1/4	35,0	21,9	23
260.08-ES	1 1/2	36,0	21,9	26
260.09-ES	2	40,4	25,4	32