


APPROVED

18.08.17

DATE

NAME

- Technica requirement
1. chains are measured at normal condition, the measured length not more than 0.50%
 2. chain ultimate tensile strength is not less than 210KN
 3. chain lateral bending angle is not less than 9°.
 4. the chain joint should be turn each other freely.
 5. zinc plate before assembly

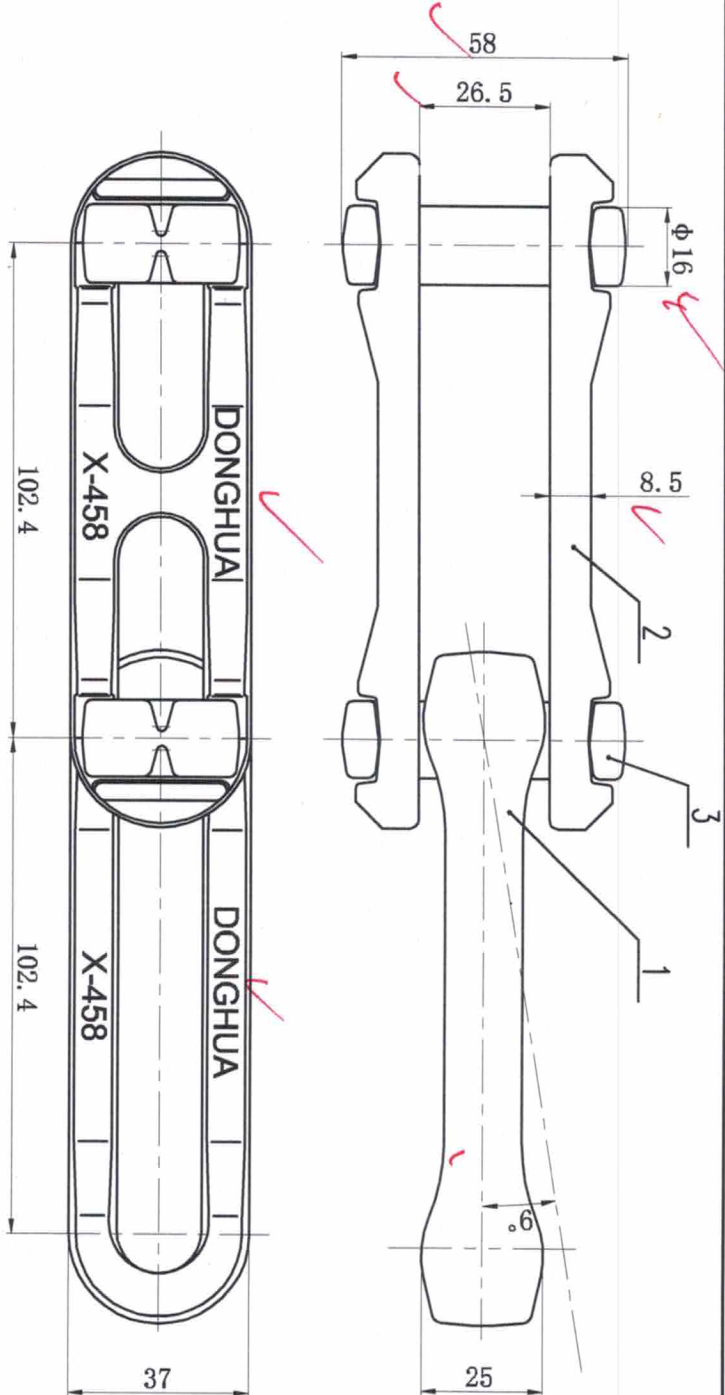

序号	代号	名称	数量	材料	重量	备注
3	X458LT-SM-DH-03	油槽销轴	2	40Cr	0.1240.248	HRC36-42°
2	X458LT-SM-DH-02	外链板	2	40Cr	0.2440.488	HRC36-42°
1	X458LT-SM-DH-01	内链板	1	40Cr	0.3940.394	HRC36-42°
组件						
标记	处数	更改文件号	签字	日期	DONGHUA	
版本号	01	标准化			X458模锻易拆链	
设计		会签			X458LT-SM-DH-00	
校对						
审核		批准				
共 页			第 页	重量		
				比例		