

min. R2,1 (4x)

single ring
 $38 \begin{smallmatrix} 0 \\ -0,05 \end{smallmatrix}$



total height
 $38 \pm 0,14$

$\varnothing 300 \text{ K6 } \begin{pmatrix} +0,005 \\ -0,027 \end{pmatrix}$

$\varnothing 339,2$

$\varnothing 340,8$

$\varnothing 380 \text{ h6 } \begin{pmatrix} 0 \\ -0,036 \end{pmatrix}$

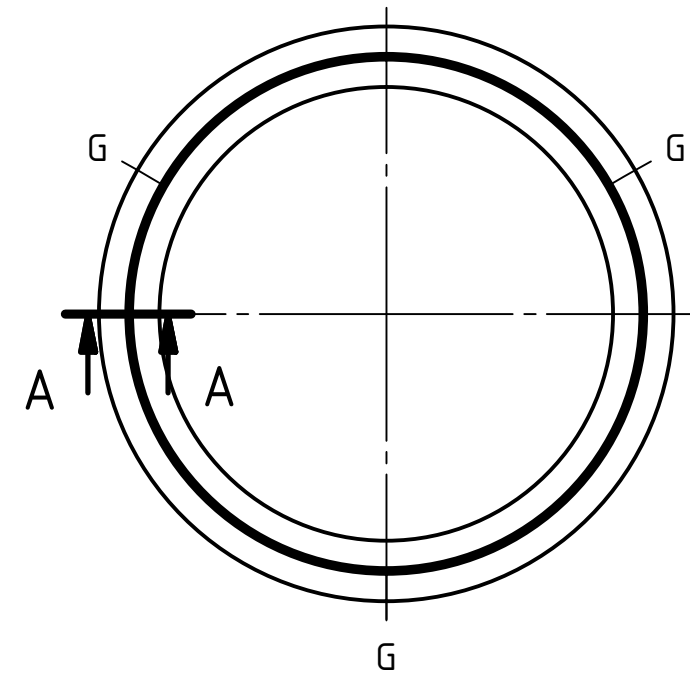

static radial load capacity:	$C_{0r}=504\text{kN}$
dynamic radial load capacity:	$C_r=156\text{kN}$
static axial load capacity:	$C_{0a}=1027\text{kN}$
dynamic axial load capacity:	$C_a=245\text{kN}$

				zul. Abweichung			Maßstab		1:5 (1:1)		Gewicht		ca. 12 kg	
				DIN ISO 2768-m			JNT BEARINGS							
					Datum	Name	Bezeichnung Crossed roller bearing							
				Gezeichnet	03.08.2012	DX								
				Kontrolliert										
				Norm										
				Werkstoff 100Cr6			Zeichnungsnummer SX 011860 VSP						1	
													A3	
Status	Änderungen	Datum	Name											