

PDF technical sheet

7919UADG/GNP42U3G




High precision angular contact ball bearings

High precision angular contact ball bearing, moulded polyamide cage centred on balls


Product definition

d	3.7402 "
D	5.1181 "
B	0.7087 "
d1	4.2087 "
d2	4.1063 "
D1	4.6496 "
D2	4.8583 "
a	1.3898 "
Contact angle, α	25 °
rs min	0.0433 "
r1s min	0.0236 "
f0	16.8
Precision class	P42
Mass	2.08 oz
Brand	NTN

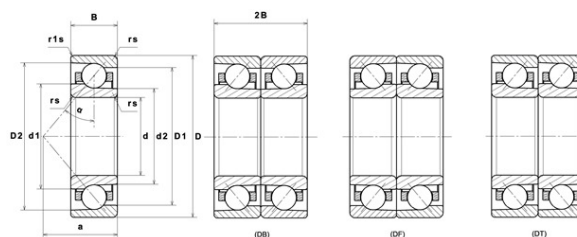

Product performance

Dynamic load, C	40 kN
Static load, C0	44.50 kN
Nlim (oil)	14,600 RPM
Nlim (grease)	9,000 RPM
Preload level	GN
Peload value	400 kN
axial rigidity	247.1 N/ μ m
radial rigidity	530 N/ μ m
Min operating temperature, Tmin	-4 °C
Max operating temperature, Tmax	248 °C
Characteristic cage frequency, FTF	0.46 Hz
Characteristic rolling element frequency, BSF	10.83 Hz
Characteristic outer ring frequency, BPF0	12.84 Hz
Characteristic inner ring frequency, BPFI	15.16 Hz

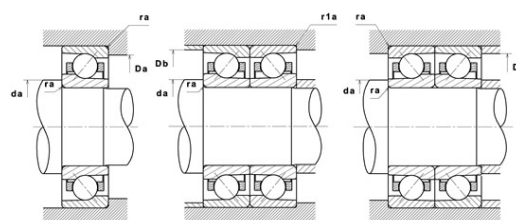

Abutment dimensions

da min	4.0157 "
Da max	4.8425 "
Db max	4.9409 "
r1a max	0.0236 "
ra max	0.0394 "
D6	4.2283 "

Calculation factors

Equivalent dynamic radial load

$$P = X \cdot Fr + Y \cdot Fa$$

Series			e	Single or DT bearing arrangement				DB or DF arrangement			
				Fa / Fr ≤ e		Fa / Fr > e		Fa / Fr ≤ e		Fa / Fr > e	
				X	Y	X	Y	X	Y	X	Y
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°	0.178	0.38	1	0	0.44	1.47	1	1.65	0.72	2.39
		0.357	0.4				1.4		1.57		2.28
		0.714	0.43				1.3		1.46		2.11
		1.07	0.46				1.23		1.38		2
		1.43	0.47				1.19		1.34		1.93
		2.14	0.5				1.12		1.26		1.82
		3.57	0.55				1.02		1.14		1.66
		5.35	0.56						1.12		1.63
		7.14	0.56				1		1.12		1.63
	25°		0.68		0.41	0.87		0.92	0.67	1.41	
	30°		0.8		0.39	0.76		0.78	0.63	1.24	

Equivalent static radial load

$$Po = Xo \cdot Fr + Yo \cdot Fa$$

Series			Single or DT bearing arrangement		DB or DF arrangement	
			X ₀	Y ₀	X ₀	Y ₀
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°		0.5	0.46	1	0.92
	25°			0.38		0.76
	30°			0.33		0.66

For single or DT bearing arrangement :

If $Po < Fr$, then use $Po = Fr$