


6309LLBNR/2AS Référence: 6309LLBNR/2AS

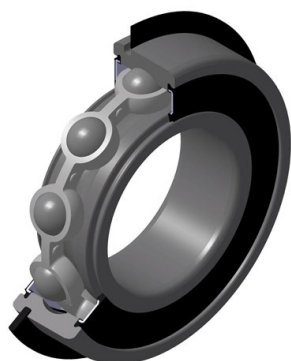

2	d	1.7717 "
	D	Product performance
	B	Dynamic load, C
	a min	0.9843 kN
	a max	Static load, C0
	Ca min	0.1292 kN
	Ca max	Patigue limit load, Cu
	Ca min	0.1291 kN
	Ca max	19.1
	Ca min	0.2138
	Ca max	260
	rs min	Min (grease)
	rs min	7,000 RPM
	rs min	0.0591 °C
	rs min	Min operating temperature, Tmin
	rs min	0.0193 °C
	rs min	Max operating temperature, Tmax
	rs min	0.0193 °C
	D3 max	Characteristic cage frequency, FTF
	b min	3.8110
	b max	0.582 Hertz
	b max	4.002 Hertz
	r0 max	Characteristic rolling element frequency, BSF
	r0 max	0.1063
	D4 max	Characteristic outer ring frequency, BPF0
	r0 max	0.1181
	f	Characteristic inner ring frequency, BPFI
	r0 max	0.0236
	f	4.944 Hertz
	f	4.1929
	Snap ring reference	0.0969 "
	Radial clearance class	R100
	Mass	CN
	Brand	2.87 oz
	Brand	NTN

Abutment dimensions	
da min	2.0866 "
da max	2.4213 "
Da max	3.6220 "
ra max	0.0591 "
rNa max	0.0197 "
Db min	4.2520 "