


PDF technical sheet 6206.NR.ZZ




Single row deep groove ball bearings

Product definition	
d	1.1811 "
D	2.4409 "
B	0.6299 "
d1	1.4921 "
D1	2.1693 "
a min	0.1209 "
a max	0.1291 "
Ca min	0.1839 "
Ca max	0.1961 "
rs min	0.0394 "
rNs min	0.0197 "
D3 max	2.3469 "
b min	0.0748 "
b max	0.0866 "
r0 max	0.0236 "
D4 max	2.6654 "
f	0.0650 "
Snap ring reference	R62
Radial clearance class	CN
Mass	0.70 oz
Brand	SNR

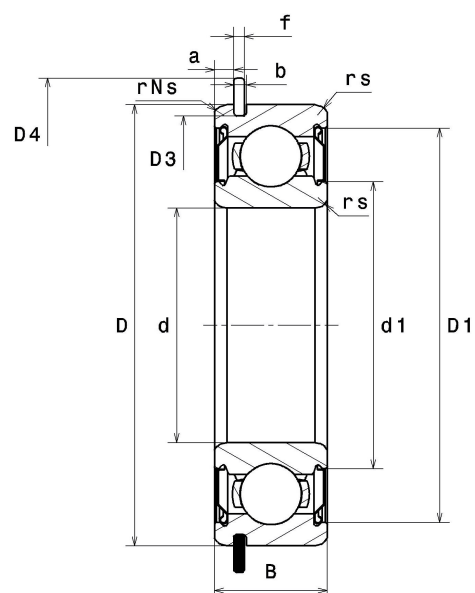

Product performance	
Dynamic load, C	19.20 kN
Static load, C0	11.30 kN
Fatigue limit load, Cu	0.51 kN
f0	13.8
Nref	12,000 RPM
Nlim	15,000 RPM
Min operating temperature, Tmin	-4 °C
Max operating temperature, Tmax	248 °C
Characteristic cage frequency, FTF	0.40 Hz
Characteristic rolling element frequency, BSF	4.62 Hz
Characteristic outer ring frequency, BPF0	3.57 Hz
Characteristic inner ring frequency, BPF1	5.43 Hz

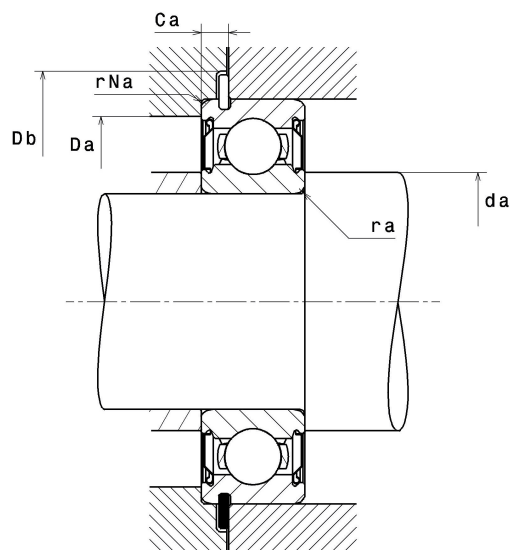

Abutment dimensions

da min	1.3780 "
da max	1.4921 "
Da max	2.2441 "
ra max	0.0394 "
rNa max	0.0197 "
Db min	2.6969 "

349/702/3/en/DGBB.jpg