



PDF technical sheet CESR204A



Insert bearings

cylindrical outer diameter with rubber damping ring, IR zinc-coated, fixing by eccentric locking collar, single lip seal

Product definition	
B	0.8425 "
B1	1.2205 "
B3	1.4252 "
C	0.5512 "
C2	1.0000 "
d	0.7874 "
d1	1.2756 "
d3	1.5748 "
D	1.8504 "
D3	2.5630 "
G	M6x1
m	0.1969 "
r	1
S	0.2953 "
SW	0.1181 "

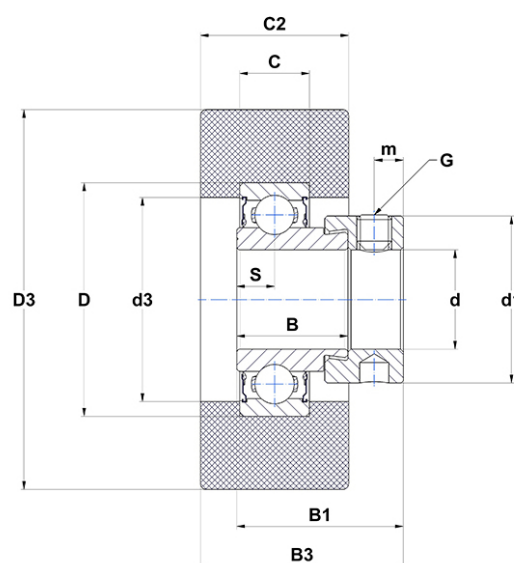

m.ncatalog.fo.featuresotherperformance	
C	12.80 kN
C0	6.65 kN
T min.	-4 °C
T max.	185 °C

Other features	
Weight	0.78 oz
Recommended tightening torque for set screw	5.50 Nm