



PDF technical sheet CESR205A



Insert bearings

cylindrical outer diameter with rubber damping ring, IR zinc-coated, fixing by eccentric locking collar, single lip seal

Product definition	
B	0.8425 "
B1	1.2205 "
B3	1.4252 "
C	0.5906 "
C2	1.0000 "
d	0.9843 "
d1	1.4724 "
d3	1.8110 "
D	2.0472 "
D3	2.5630 "
G	M6x1
m	0.1969 "
r	1
S	0.2953 "
SW	0.1181 "

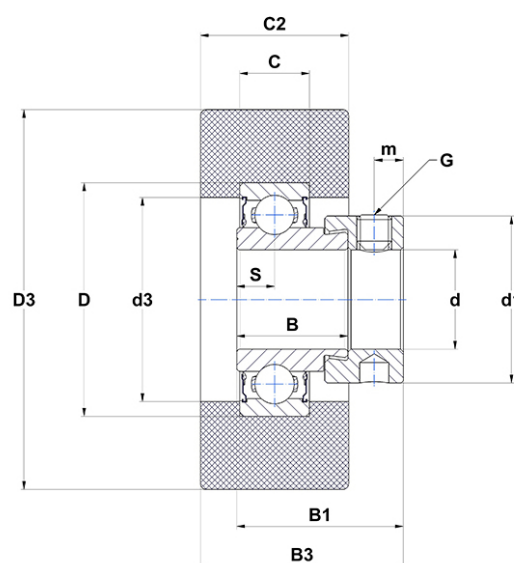

m.ncatalog.fo.featuresotherperformance	
C	14 kN
C0	7.88 kN
T min.	-4 °C
T max.	185 °C

Other features	
Weight	0.92 oz
Recommended tightening torque for set screw	5.50 Nm