



## PDF technical sheet CEX207



### Insert bearings

cylindrical outer diameter, fixing by eccentric locking collar, seal with slinger

| Product definition |          |
|--------------------|----------|
| a                  | 0.1299 " |
| b                  | 0.0748 " |
| B                  | 1.4803 " |
| B1                 | 2.0118 " |
| B2                 | 0.6890 " |
| C                  | 0.7874 " |
| C1                 | 0.1969 " |
| d                  | 1.3780 " |
| d1                 | 2.1850 " |
| D                  | 2.8346 " |
| G                  | M8x1     |
| m                  | 0.2559 " |
| N1                 | 2.7091 " |
| r                  | 1.5      |
| S                  | 0.7402 " |
| SW                 | 0.1575 " |

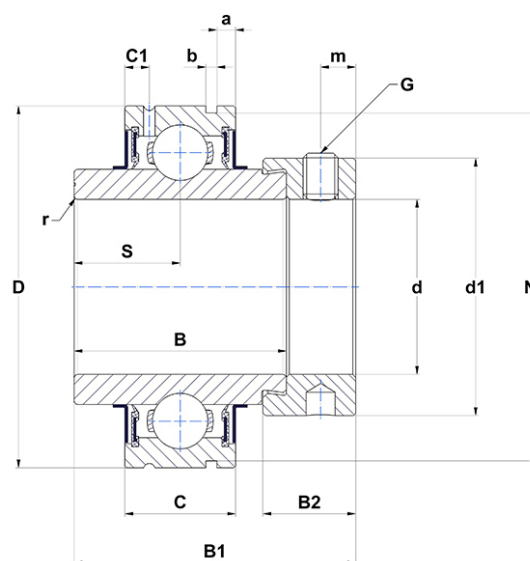

| m.ncatalog.fo.featuresotherperformance |          |
|----------------------------------------|----------|
| C                                      | 25.70 kN |
| C0                                     | 15.20 kN |
| T min.                                 | -4 °C    |
| T max.                                 | 212 °C   |

| Other features                              |          |
|---------------------------------------------|----------|
| Weight                                      | 2.12 oz  |
| Recommended tightening torque for set screw | 11.50 Nm |