



## PDF technical sheet UC21132G2



### Insert bearings

zinc-coated insert, spherical outer diameter with locking pin, fixing by socket set screw, seal with slinger, food grease

| Product definition |          |
|--------------------|----------|
| B                  | 2.1890 " |
| C                  | 0.9843 " |
| C1                 | 0.2835 " |
| d                  | 2.0000 " |
| D                  | 3.9370 " |
| G                  | 3/824UNF |
| m                  | 0.3543 " |
| r                  | 1.1      |
| S                  | 0.8740 " |
| SW                 | 0.1875 " |

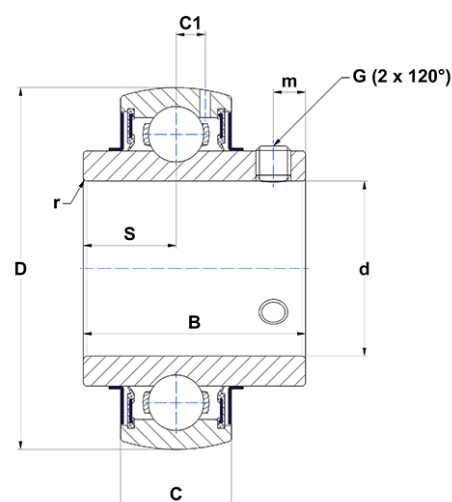

| m.ncatalog.fo.featuresotherperformance |          |
|----------------------------------------|----------|
| C                                      | 43.55 kN |
| C0                                     | 29.20 kN |
| T min.                                 | -4 °C    |
| T max.                                 | 212 °C   |

| Other features                              |          |
|---------------------------------------------|----------|
| Weight                                      | 4.48 oz  |
| Recommended tightening torque for set screw | 16.80 Nm |