


PDF technical sheet N408




Single row cylindrical roller bearings

Single row cylindrical roller bearing, floating, separable, pressed steel cage

Product definition	
d	1.5748 "
D	4.3307 "
B	1.0630 "
E	3.6220 "
F	2.2835 "
d1	2.5512 "
rs min	0.0787 "
r1s min	0.0787 "
Radial clearance class	CN
Mass (without HJ ring)	4.44 oz
Brand	NTN

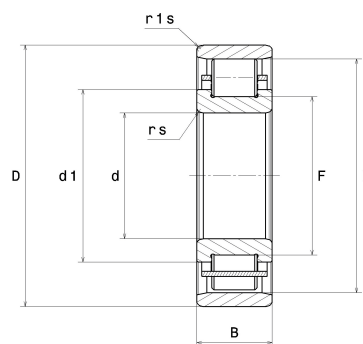

Product performance	
Dynamic load, C	95.50 kN
Static load, C0	89 kN
Fatigue limit load, Cu	10.90 kN
Nlim (oil)	6,700 RPM
Nlim (grease)	5,700 RPM
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	248 °C

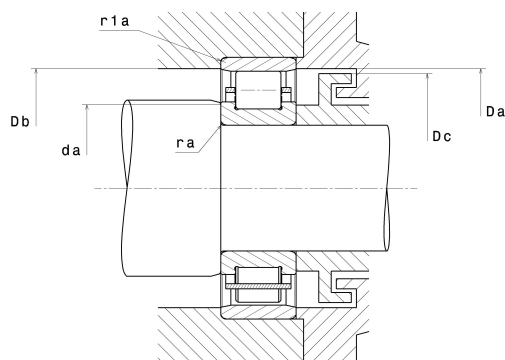

Abutment dimensions	
da min	1.9291 "
Da max	3.9764 "
Db min	3.6614 "
Dc max	3.5433 "
ra max	0.0787 "
r1a max	0.0787 "

Calculation factors

Equivalent dynamic radial load

$$P = F_r$$

Equivalent static radial load

$$P_0 = F_r$$