


PDF technical sheet N412




Single row cylindrical roller bearings

Single row cylindrical roller bearing, floating, separable, pressed steel cage

Product definition	
d	2.3622 "
D	5.9055 "
B	1.3780 "
E	5.0000 "
F	3.2677 "
d1	3.6142 "
rs min	0.0827 "
r1s min	0.0827 "
Radial clearance class	CN
Mass (without HJ ring)	10.40 oz
Brand	NTN

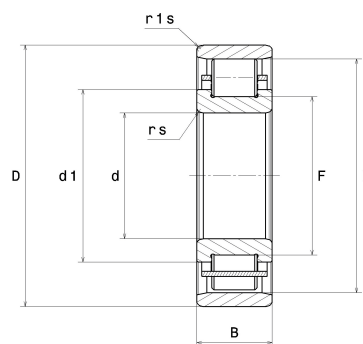

Product performance	
Dynamic load, C	167 kN
Static load, C0	168 kN
Fatigue limit load, Cu	20.20 kN
Nlim (oil)	4,600 RPM
Nlim (grease)	3,900 RPM
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	248 °C

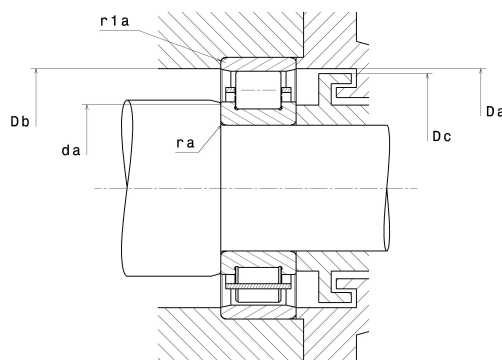

Abutment dimensions	
da min	2.7953 "
Da max	5.4724 "
Db min	5.0394 "
Dc max	4.9213 "
ra max	0.0787 "
r1a max	0.0787 "

Calculation factors

Equivalent dynamic radial load

$$P = F_r$$

Equivalent static radial load

$$P_0 = F_r$$

NTN-SNR ROULEMENTS – www.ntn-snr.com

1 rue des Usines – 74010 Annecy Cedex – France – Tel. +33 (0)4 50 65 30 00

S.A. au capital de 123 599 542 € - RCS ANNECY B 325 821 072 - Id. Fiscale : FR 48 325 821 072 – SIRET 325 821 072 00015 –

Code APE 2815 Z – Code NACE 28.15