


PDF technical sheet NH320G1C4




Single row cylindrical roller bearings

Single row cylindrical roller bearing with thrust ring, separable, locating, brass cage

Product definition	
d	3.9370 "
D	8.4646 "
B	1.8504 "
E	7.3031 "
F	5.0984 "
d1	5.5315 "
B1	0.5118 "
B2	0.8858 "
rs min	0.1181 "
r1s min	0.1181 "
Radial clearance class	C4
HJ Ring reference	HJ320
Mass (HJ ring)	32.49 oz
Brand	NTN

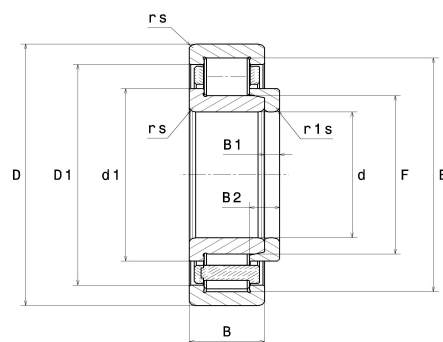

Product performance	
Dynamic load, C	299 kN
Static load, C0	335 kN
Fatigue limit load, Cu	35.60 kN
Nlim (oil)	3,800 RPM
Nlim (grease)	3,300 RPM
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	248 °C
Characteristic cage frequency, FTF	0.41 Hz
Characteristic rolling element frequency, BSF	5.45 Hz
Characteristic outer ring frequency, BPF0	5.34 Hz
Characteristic inner ring frequency, BPFI	7.66 Hz

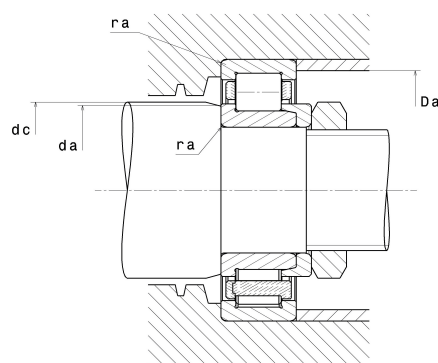

Abutment dimensions	
da min	4.4488 "
dc min	5.6299 "
Da max	7.9528 "
ra max	0.0984 "

Calculation factors

Equivalent dynamic radial load

$$P = Fr$$

Equivalent static radial load

$$P_0 = Fr$$