


## PDF technical sheet NJ2213C3




### Single row cylindrical roller bearings

Single row cylindrical roller bearing, single direction for axial loads, separable, pressed steel cage.

| Product definition     |          |
|------------------------|----------|
| d                      | 2.5591 " |
| D                      | 4.7244 " |
| B                      | 1.2205 " |
| E                      | 4.1575 " |
| F                      | 3.1339 " |
| d1                     | 3.3386 " |
| rs min                 | 0.0591 " |
| r1s min                | 0.0591 " |
| Radial clearance class | C3       |
| Mass (without HJ ring) | 5.33 oz  |
| Brand                  | NTN      |

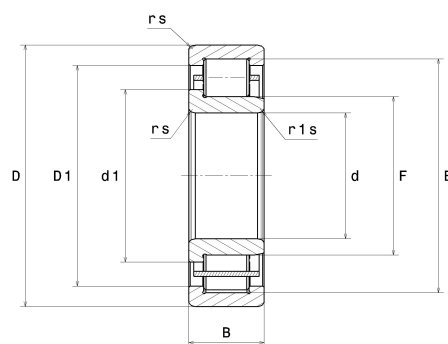

| Product performance             |           |
|---------------------------------|-----------|
| Dynamic load, C                 | 120 kN    |
| Static load, C0                 | 149 kN    |
| Fatigue limit load, Cu          | 18.20 kN  |
| Nlim (oil)                      | 6,300 RPM |
| Nlim (grease)                   | 5,400 RPM |
| Min operating temperature, Tmin | -40 °C    |
| Max operating temperature, Tmax | 248 °C    |

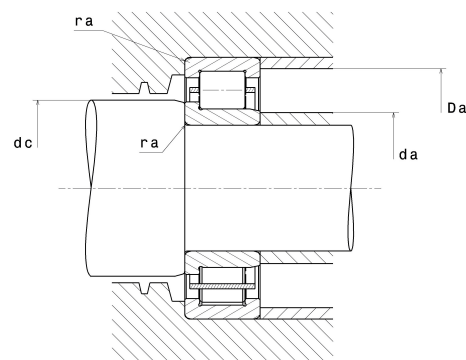

| Abutment dimensions |          |
|---------------------|----------|
| da min              | 2.8740 " |
| da max              | 3.0315 " |
| dc min              | 3.4252 " |
| Da max              | 4.4094 " |
| ra max              | 0.0591 " |

### Calculation factors

Equivalent dynamic radial load

$$P = Fr$$

Equivalent static radial load

$$P_0 = Fr$$