


PDF technical sheet NJ2317C4




Single row cylindrical roller bearings

Single row cylindrical roller bearing, single direction for axial loads, separable, pressed steel cage.

Product definition	
d	3.3465 "
D	7.0866 "
B	2.3622 "
E	6.1417 "
F	4.2520 "
d1	4.6260 "
rs min	0.1181 "
r1s min	0.1181 "
Radial clearance class	C4
Mass (without HJ ring)	24.20 oz
Brand	NTN

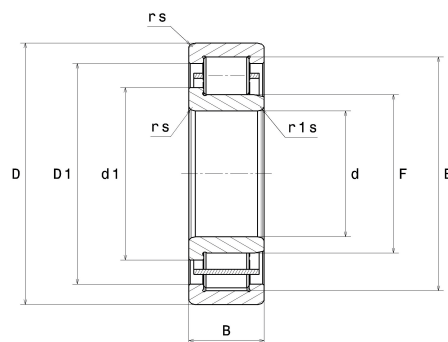

Product performance	
Dynamic load, C	315 kN
Static load, C0	380 kN
Fatigue limit load, Cu	42.60 kN
Nlim (oil)	4,000 RPM
Nlim (grease)	3,400 RPM
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	248 °C

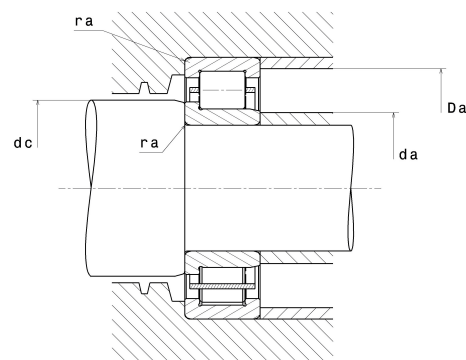

Abutment dimensions	
da min	3.8583 "
da max	4.1732 "
dc min	4.6850 "
Da max	6.5748 "
ra max	0.0984 "

Calculation factors

Equivalent dynamic radial load

$$P = Fr$$

Equivalent static radial load

$$P_0 = Fr$$