


PDF technical sheet NJ2318




Single row cylindrical roller bearings

Single row cylindrical roller bearing, single direction for axial loads, separable, pressed steel cage.

Product definition	
d	3.5433 "
D	7.4803 "
B	2.5197 "
E	6.4961 "
F	4.5276 "
d1	4.9213 "
rs min	0.1181 "
r1s min	0.1181 "
Radial clearance class	CN
Mass (without HJ ring)	29.31 oz
Brand	NTN

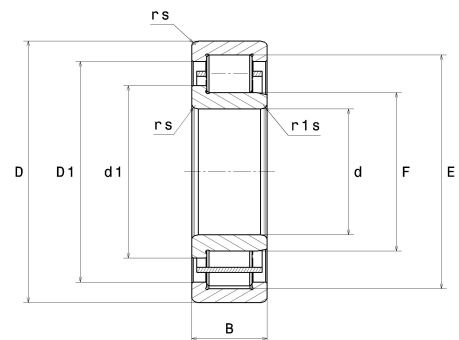

Product performance	
Dynamic load, C	325 kN
Static load, C0	395 kN
Fatigue limit load, Cu	43.50 kN
Nlim (oil)	3,800 RPM
Nlim (grease)	3,200 RPM
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	248 °C

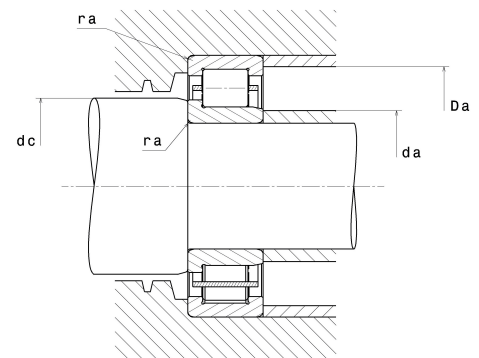

Abutment dimensions	
da min	4.0551 "
da max	4.3701 "
dc min	5.0000 "
Da max	6.9685 "
ra max	0.0984 "

Calculation factors

Equivalent dynamic radial load

$$P = Fr$$

Equivalent static radial load

$$P_0 = Fr$$