

PDF technical sheet NJ2326EG1C3




Single row cylindrical roller bearings

Single row cylindrical roller bearing, single direction for axial loads, separable, brass cage.

Product definition	
d	5.1181 "
D	11.0236 "
B	3.6614 "
E	9.7244 "
F	6.5748 "
d1	7.2047 "
rs min	0.1575 "
r1s min	0.1575 "
Radial clearance class	C3
Mass (without HJ ring)	103.35 oz
Brand	NTN



Product performance	
Dynamic load, C	920 kN
Static load, C0	1,230 kN
Fatigue limit load, Cu	121 kN
Nlim (oil)	2,300 RPM
Nlim (grease)	2,000 RPM
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	248 °C
Characteristic cage frequency, FTF	0.40 Hz
Characteristic rolling element frequency, BSF	4.98 Hz
Characteristic outer ring frequency, BPF0	5.65 Hz
Characteristic inner ring frequency, BPF1	8.35 Hz

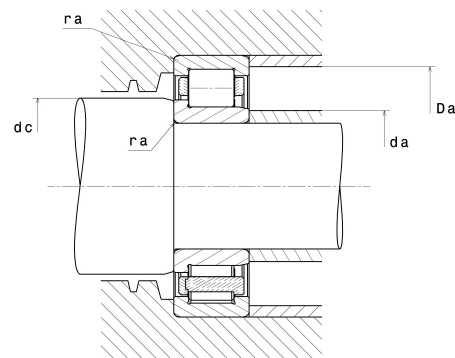

Abutment dimensions	
da min	5.7480 "
da max	6.4567 "
dc min	7.2441 "
Da max	10.3937 "
ra max	0.1181 "

Calculation factors

Equivalent dynamic radial load

$$P = Fr$$

Equivalent static radial load

$$P_0 = Fr$$