

## PDF technical sheet NJ320EG1C3




### Single row cylindrical roller bearings

Single row cylindrical roller bearing, single direction for axial loads, separable, brass cage.

| Product definition     |          |
|------------------------|----------|
| d                      | 3.9370 " |
| D                      | 8.4646 " |
| B                      | 1.8504 " |
| E                      | 7.5394 " |
| F                      | 5.0197 " |
| d1                     | 5.5236 " |
| rs min                 | 0.1181 " |
| r1s min                | 0.1181 " |
| Radial clearance class | C3       |
| Mass (without HJ ring) | 29.38 oz |
| Brand                  | NTN      |



| Product performance                           |           |
|-----------------------------------------------|-----------|
| Dynamic load, C                               | 380 kN    |
| Static load, C0                               | 425 kN    |
| Fatigue limit load, Cu                        | 45.20 kN  |
| Nlim (oil)                                    | 3,500 RPM |
| Nlim (grease)                                 | 2,900 RPM |
| Min operating temperature, Tmin               | -40 °C    |
| Max operating temperature, Tmax               | 248 °C    |
| Characteristic cage frequency, FTF            | 0.40 Hz   |
| Characteristic rolling element frequency, BSF | 4.78 Hz   |
| Characteristic outer ring frequency, BPF0     | 5.20 Hz   |
| Characteristic inner ring frequency, BPF1     | 7.80 Hz   |

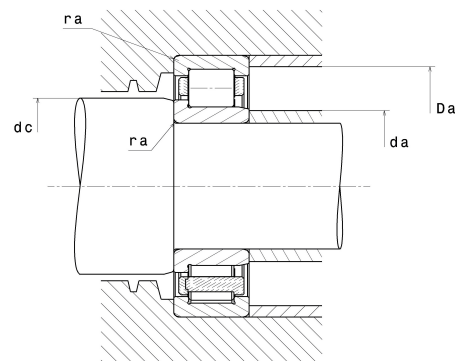

| Abutment dimensions |          |
|---------------------|----------|
| da min              | 4.4488 " |
| da max              | 4.9213 " |
| dc min              | 5.6299 " |
| Da max              | 7.9528 " |
| ra max              | 0.0984 " |

### Calculation factors

Equivalent dynamic radial load

$$P = Fr$$

Equivalent static radial load

$$P_0 = Fr$$